

Expert
Solutions
for Critical
Applications



ADVANCED™
Brand Portfolio



Where Innovation Flows

www.wildenpump.com

ADVANCED™ BOLTED METAL PUMPS
ADVANCED™ BOLTED PLASTIC PUMPS
HIGH PRESSURE PUMPS

Advanced™ Solutions

Since 1955 Wilden Pump and Engineering LLC has been the global leader in air-operated double-diaphragm (AODD) pumps. Wilden is deeply committed to the pursuit of excellence, customer satisfaction, research and development and market knowledge. As a premier organization, Wilden has the infrastructure, knowledge base, and intellectual capital to exceed your expectations worldwide.

Our world-class distributor network ensures that you will have access to the latest pump technologies and fluid transfer services available. Wilden and its distributor network are devoted to your industries, applications and processes, servicing your needs with world-class products, delivery and best-of-class expertise. Put us to the test and contact your local distributor today at www.wildendistributor.com

Unique Characteristics

- Air-operated pumps (non electrical)
- Superior flow rates and efficiency
- Superior product containment
- Bolted liquid paths
- Self priming
- Run-dry capable
- Anti-freezing technology
- Deadhead without damage
- Variable flow and pressure
- Intrinsically safe
- Lube-free operation
- ON/OFF reliability
- Large solids passage
- Ease of operation and maintenance

Applications

- Solvents
- Acids
- Caustics
- High viscosity
- High pressure
- Large solids
- Abrasive media
- Hazardous and flammable liquids



Installation Versatility

Self-Priming

- Portable
- High vacuum
- Run-dry capable
- No heat generation



Positive Suction Head

- Preferred installation for high viscosity applications
- Superior product containment
- Inlet pressure should be limited to 0.7 bar (10 psig) to maximize parts life



Submerged

- Air-operated pumps (non electrical)
- Single-point exhaust options available for submersible applications
- Multiple material options available for process fluid compatibility

MARKETS SERVED

ENERGY

Wilden's pumping solutions are leading the way in energy efficiency in storage terminals, biofuels and solar cell manufacturing. Wilden pumps play a vital role as transfer points from one mode of transportation to another and as safe, secure storage locations until product transfer is needed. Wilden is also committed to helping build a clean energy economy through the use of biofuels.

Typical Applications Handled:

- Raw crude oil
- Chemicals
- Caustics
- Ethanol
- Biodiesel
- Gases
- Crude oil
- Refined petroleum products
- Solvents
- Solar cell manufacturing
- Petroleum
- Lube oils
- Gasoline
- Diesel fuel

PROCESS

Wilden is a recognized leader in the process industries as you can find Wilden pumps in many of the top chemical, food and beverage and pharmaceutical plants around the world.

Typical Applications Handled:

- Acids
- Solvents
- General chemicals
- Pulp and paper
- Low solvent coating
- Caustics
- Soap and detergents
- Paints, inks and coatings
- Cosmetics
- Solvent-less coating
- Alcohols

WATER/WASTEWATER

Wilden plays a critical role in handling and transferring fluids used in municipal and industrial water and wastewater plants.

Typical Applications Handled:

- Wastewater systems
- Rehabilitation systems
- Distribution
- Metal fabrication
- Potable water systems
- Water treatment supply
- Collection and disposal





STATE OF THE ART
Air Distribution Systems

The Pro-Flo® SHIFT is the new standard for AODD pumps. The innovative, yet simple, Pro-Flo® SHIFT Air Distribution System (ADS) features an "air control spool" that automatically optimizes air consumption and eliminates the overfilling that can lead to overcharging of the air chamber, all while causing no corresponding reduction in flow rate.

The Pro-Flo® SHIFT's revolutionary ADS design meters the air flow, allowing for just enough air to keep the pumping process operational. The results are a reduction in air consumption and operational costs while maximum operational efficiency and volumetric consistency are maintained.

Now is the perfect time to shift your thinking in AODD pump performance with the "game-changing" Pro-Flo® SHIFT.



Market Position:

- Cost efficient: 50% less expensive than an electronically-actuated ADS
- Faster return on investment
- Robust design for harsh operating conditions
- Metered air consumption for less product waste
- Creates the highest performance ratio
- Superior flow rate
- Superior anti-freezing
- Single-point exhaust option
- Lube-free operation
- Reduced maintenance costs
- ON/OFF reliability
- Environmental sensitivity

- Reduced energy consumption
- Lower carbon footprint
- ATEX-compatible for use in explosive atmospheres

Application Traits:

- Greater yield per SCFM of air used
- Wider application range
- Repeatable, predictable performance
- Less product waste
- Max. Mean Time Between Repair (MTBR)
- Increased application range/ compatibility
- Minimum training required
- No special skill set needed for maintenance or operation

Features:

- Simple and durable pump design
- Simple components
- Faster, easier setup time
- Plug-N-Play operation
- No electricity needed
- Precise flow rate at start-up
- Non-stalling unbalanced spool

Availability:

- 38 mm (1-1/2")
- 51 mm (2")
- 76 mm (3")

SHIFTING PERFORMANCE TO A WHOLE NEW LEVEL.



Market Position:

- Variable control (discharge flow rates and air consumption)
- Superior flow rate
- Superior anti-freezing
- Single-point exhaust options
- Lube-free operation
- ON/OFF reliability
- ATEX models available

Features:

- Efficiency Management System (EMS™)
- Metal and plastic material options
- Non-stalling unbalanced spool
- Simple and durable design

Application Traits:

- Maximize performance and efficiency
- Process applications
- Max. Mean Time Between Repair (MTBR)

Availability:

- 13 mm (1/2")
- 25 mm (1")
- 38 mm (1-1/2")
- 51 mm (2")
- 76 mm (3")
- 102 mm (4")



Market Position:

- Anti-freezing
- ON/OFF reliability
- Longest-lasting wear parts
- Lube-free operation

Features:

- Plastic center block
- Non-stalling unbalanced spool
- Simple and durable design

Application Traits:

- Maximum reliability
- Process applications
- Max. Mean Time Between Repair (MTBR)

Availability:

- 6 mm (1/4"), 13 mm (1/2"), 25 mm (1"), 38 mm (1-1/2"), 51 mm (2"), 76 mm (3")



Market Position:

- Direct electrical interface
- Superior ON/OFF reliability
- Reduced systems costs
- Lube-free operation

Features:

- Externally controlled
- Various voltage options
- Nema 4, Nema 7 or ATEX
- Simple installation

Application Traits:

- System automation
- 4-20 mA pH adjusting
- Batching applications
- OEM accounts

Availability:

- 6 mm (1/4"), 13 mm (1/2"), 25 mm (1")

Progressive Diaphragm Technology

Thermoplastic Elastomer (TPE)

- Polyurethane is an outstanding general-purpose diaphragm for nonaggressive chemical applications such as water, wastewater and seawater. It provides excellent flex life, abrasion resistance and durability at an economical price.
- Wil-Flex™ provides a low-cost alternative to PTFE with a cost comparable to neoprene. Made of Santoprene™, Wil-Flex is ideal for use with acidic and caustic fluids such as sodium hydroxide, sulfuric or hydrochloric acids. Exhibiting excellent flex life, abrasion resistance, temperature range and durability, it is widely used in the chemical process, food, pharmaceutical and wastewater industries. Versions of Wil-Flex are available that comply with FDA 21 CFR 177 standards for food and beverage applications.
- Saniflex™ is an excellent material for food processing applications. Made of Hytrel®, it exhibits good flex life and excellent abrasion resistance. Hytrel also offers superior sealing or seal energizing due to its low compression set characteristics. Saniflex versions are available that comply with FDA 21 CFR 177 standards.
- Geolast® exhibits enhanced oil-resistance and low oil swell making it ideal for petroleum industry applications. Equivalent to nitrile (Buna-N), Geolast provides moderate flex life and good abrasion resistance over a wide temperature range at a lower cost than fabric-reinforced Buna-N.

Polytetrafluoroethylene (PTFE) Elastomers

- Because it is one of the most chemically inert compounds available, PTFE can be used with an extremely wide range of fluids. PTFE is excellent for highly aggressive fluids such as aromatic or chlorinated hydrocarbons, acids, caustics, ketones and acetates. Its properties provide excellent flex life and moderate abrasion resistance. In addition, PTFE complies with FDA 21 CFR 177 and USP Class VI standards for food, beverage and pharmaceutical applications. Because PTFE is non-elastic, a backup diaphragm of a different material must be used to provide flexibility and memory. Material options for backup diaphragms are Neoprene, Saniflex, EPDM and high temperature Buna-N.


Elastomer Temperature Limits:

| | | |
|---------------------|--------------|-------------------------------|
| | Neoprene | -18° to 93°C [0° to 200°F] |
| | Buna-N | -12° to 82°C [10° to 180°F] |
| | EPDM | -51° to 138°C [-60° to 280°F] |
| | Viton® | -40 to 177°C [-40 to 350°F] |
| Thermoplastic (TPE) | Polyurethane | -12° to 66°C [10° to 150°F] |
| | Wil-Flex™ | -40° to 107°C [-40° to 225°F] |
| | Saniflex™ | -29° to 104°C [-20° to 220°F] |
| PTFE | Geolast® | -40° to 82°C [-40° to 180°F] |
| PTFE | PTFE | 4° to 104°C [40° to 220°F] |

CAUTION: Maximum temperature limits are based upon mechanical stress only. Certain chemicals will significantly reduce maximum safe operating temperatures. Please verify the chemical resistance limitations of elastomers and all other pump components prior to pump installation. Wilden's online Chemical Guide and a Wilden distributor should be consulted for specifics in elastomer selection.

Go to www.wildenchemicalguide.com for your Wilden Chemical Compatibility Chart.

Hytrel® and Viton® are registered trademark of DuPont Company
Santoprene™ is a trademark of ExxonMobil

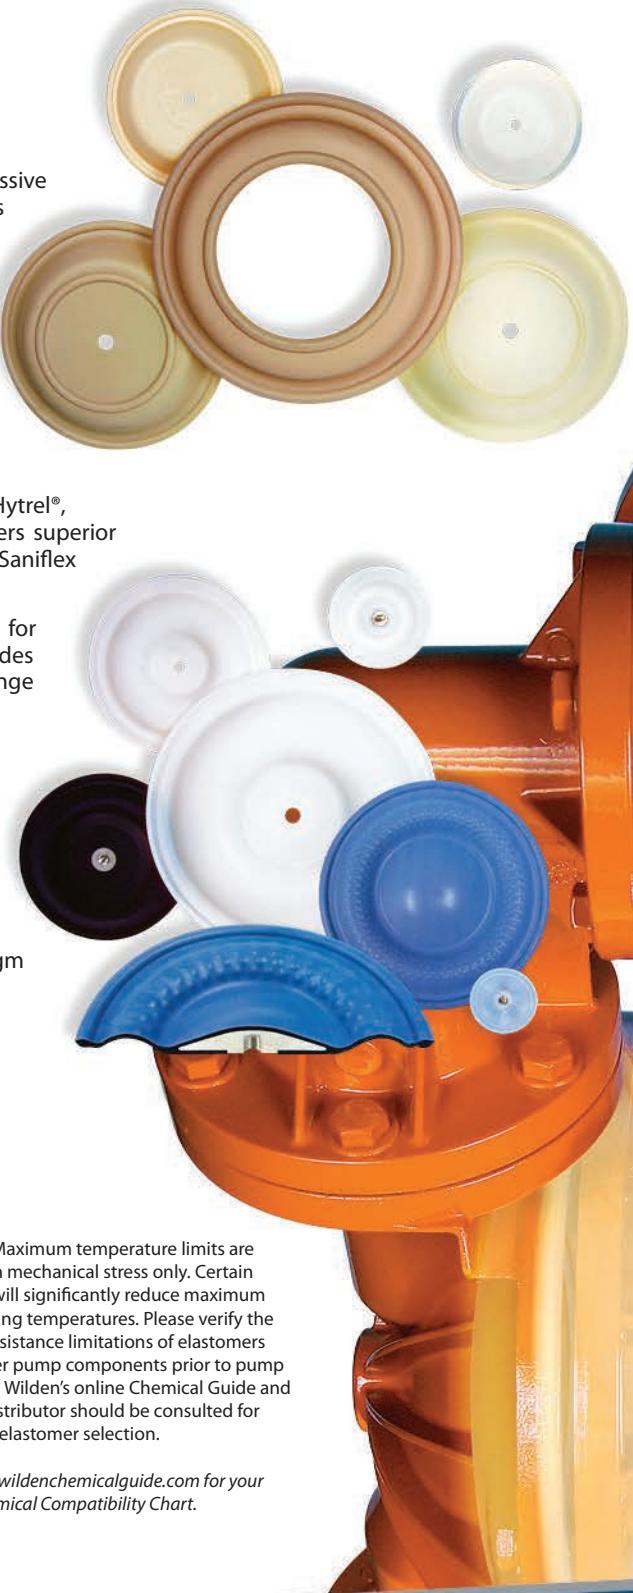

Rubber Elastomers

- Neoprene is an exceptional general-purpose, low-cost diaphragm. Perfect for nonaggressive chemical applications such as water-based slurries, well water or seawater, it provides good flex life and abrasion resistance.
- Buna-N provides excellent performance in applications involving petroleum/oil-based fluids such as leaded gasoline, fuel oils, kerosene, turpentine and motor oils. In wide use throughout the fuel processing industry, Buna-N is also referred to as nitrile and provides moderate flex life and moderate abrasion resistance. For food and beverage applications, versions are available that comply with FDA 21 CFR 177 standards.
- EPDM is an excellent material for extremely cold temperatures and is an economical alternative when pumping dilute acids or caustics. EPDM diaphragms are in use in the manufacturing, food, pharmaceutical and paint/coating industries. The material exhibits good flex life and moderate abrasion resistance, and it is available in versions that comply with FDA 21 CFR 177 standards. EPDM is also a good choice where statically dissipative materials are required.
 - Viton® is excellent for extremely hot temperatures and provides exceptional performance with aggressive fluids such as aromatic/chlorinated hydrocarbons and strong, aggressive acids. Viton is often the only diaphragm material suitable for applications where harsh chemicals are used because of its high temperature limit and chemical resiliency. It provides moderate flex life and moderate abrasion resistance.

Ultra-Flex™ Diaphragm Technology

- Guaranteed longer life – If longer life is not experienced, Wilden will send you a new set of Ultra-Flex™ diaphragms free of charge.
- Convolute shape, altered fabric placement and unique hardware work together to decrease the unit loading on the diaphragm and distribute stress.
- MATERIAL OPTIONS: Neoprene, Buna-N, EPDM, Viton®

Advanced™ Bolted Pumps

As the global leader in AODD bolted pumps, Wilden has the largest material offering in the industry. The Advanced™ metal and plastic bolted pumps offered by Wilden are specifically designed for maximum performance, efficiency and containment. The bolted configuration ensures total product containment while the liquid path reduces internal friction to maximize output and efficiency. Multiple elastomer options are available to meet and exceed your abrasion, temperature and chemical compatibility challenges.

Advanced™ pumps are offered in aluminum, stainless steel, alloy C, polypropylene, PVDF and PFA. A variety of connection options and specialized air distribution systems are also available for your specific application needs.



Your Needs



Performance



Containment



Cost

Our Solutions

Advanced™ Pumps

- Higher flow rates
- Variable flow and pressure
- Shear sensitive
- Intrinsically safe
- Dry-run capable
- Portable and submersible
- Large solids passage
- High suction lift

Superior Containment

- Leak-free operation
- Superior torque retention
- Unique valve seat design
- Superior finish on sealing surfaces
- Multiple liquid connections available

Enhanced Efficiencies

- Pro-Flo® SHIFT, Pro-Flo X™, Pro-Flo®, Accu-Flo™
- Anti-freezing ADS
- Greater flow per SCFM input
- Low cost of ownership
- Ease of operation and maintenance

The Results

Success


- Higher yields
- Increased pump output
- Increased ON/OFF reliability
- Reduced turbulence
- Reduced internal friction

Containment Ensured

- Leak-free pump operation
- Viscous and non-viscous product transfer
- Largest chemical compatibilities
- Transfer with confidence

Cost Efficient

- Optimized applications
- Reduced air consumption
- Reduced kilowatt usage
- Longest Mean Time Between Repair (MTBR)
- Lower operational costs and downtime
- Saves you money

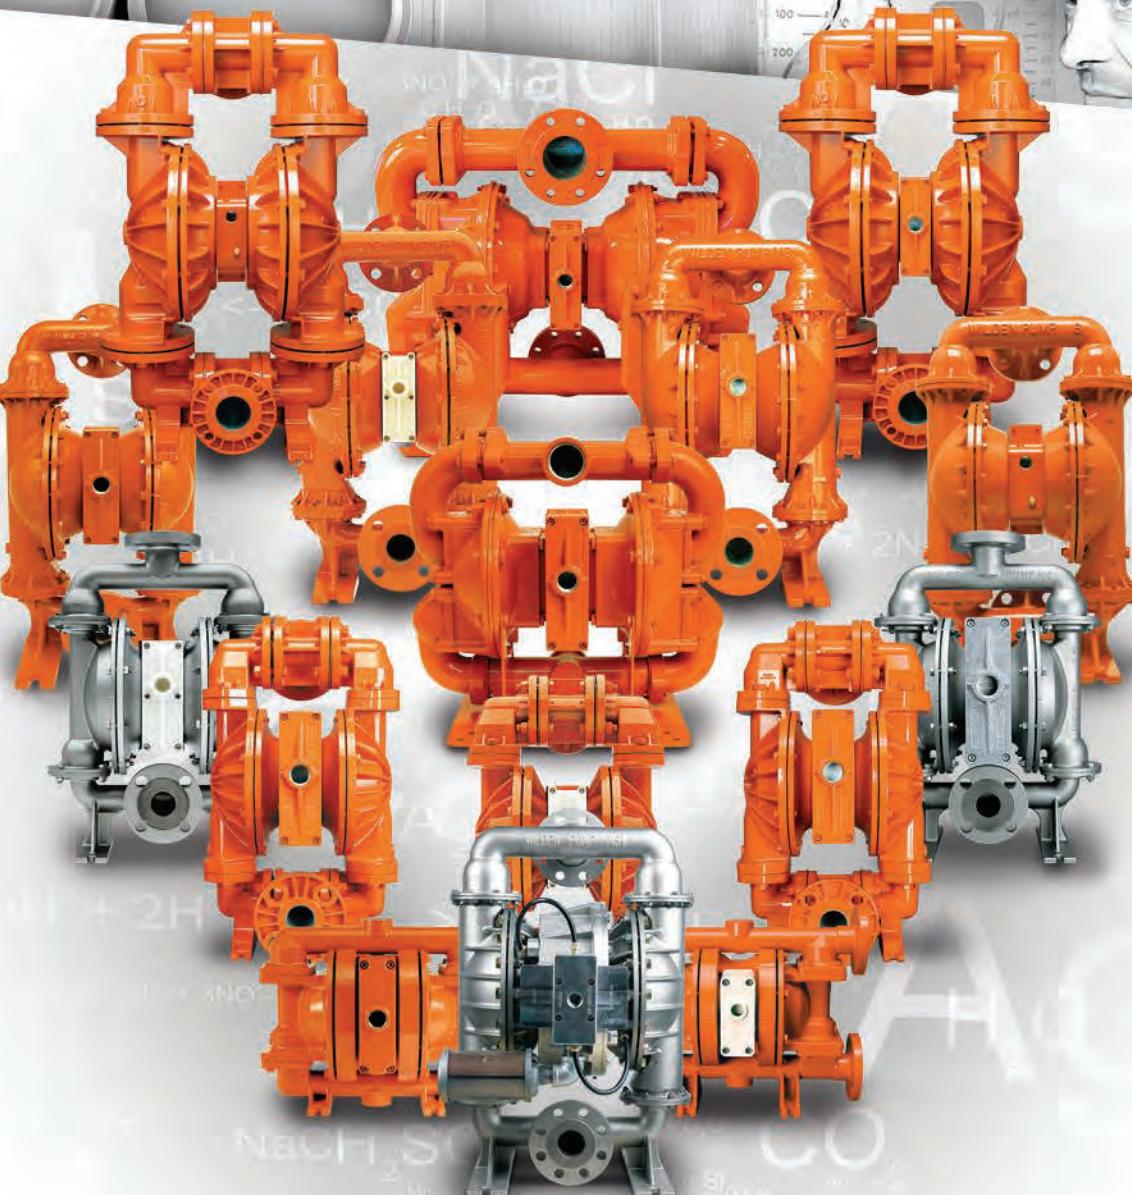

ADVANCED™ Metal Bolted Pumps

Features

- ADS: Pro-Flo® SHIFT, Pro-Flo®, Pro-Flo X™, Accu-Flo™
- All-metal bolted construction
- Higher flow rates
- Superior containment
- Anti-freezing technology
- Portable and submersible
- BSPT (NPT) or DIN (ANSI) liquid connections available
- Lube-free operation

Tech Data

- Sizes: 6 mm (1/4") through 76 mm (3")
- Materials: Aluminum, Ductile Iron, Stainless Steel, Alloy C
- Elastomer Temperatures: Up to 177°C (350°F)
- Elastomers: Buna-N, Neoprene, EPDM, Viton®, Wil-Flex™, Saniflex™, Polyurethane, PTFE, Geolast®


Performance Data

- Max flow rates: 1056 lpm (279 gpm)
- Max suction lift: 9.6 m (30.6') Wet, 8.0 m (26.1') Dry
- Max disp. per stroke: 6.09 L (1.61 gal)
- Max discharge pressure: 20.7 bar (300 psig)
- Max size solids: 76 mm (3")

METAL CURVES


PS400

38 mm (1-1/2")
ALUMINUM

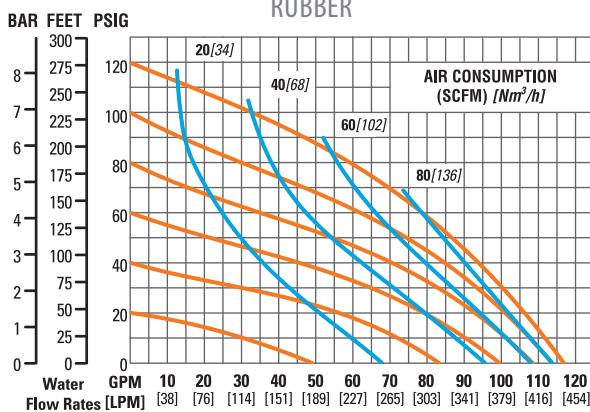


PS400

38 mm (1-1/2")
STAINLESS STEEL

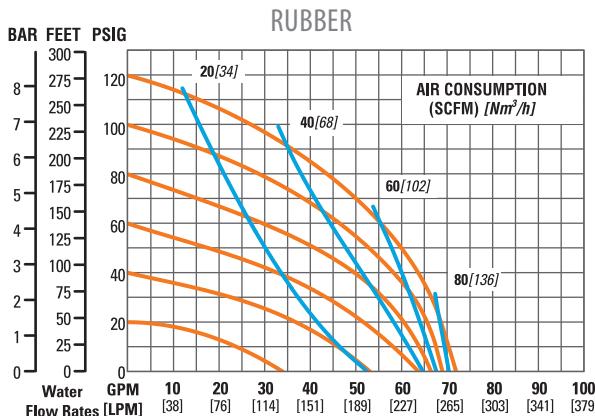


**PS420/
PS430**

38 mm (1-1/2")
STAINLESS STEEL

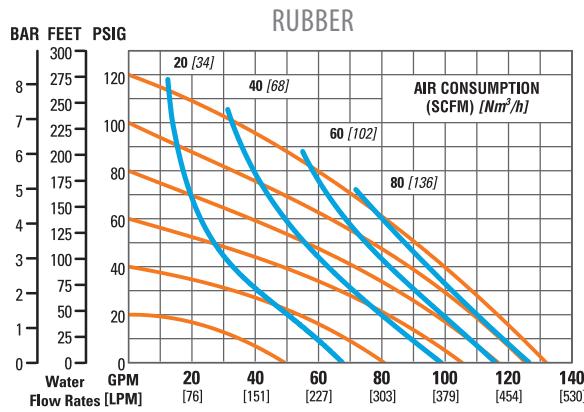


PS800


51 mm (2")
ALUMINUM
STAINLESS STEEL

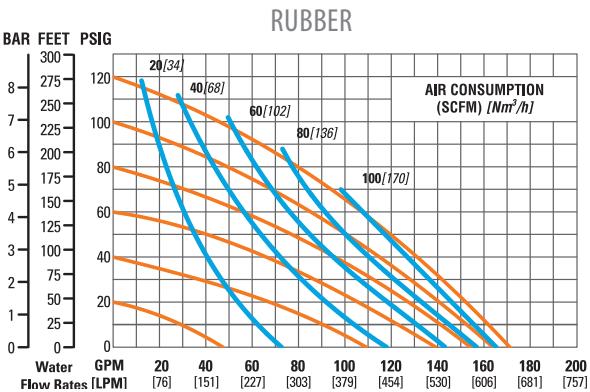


FULL-STROKE PTFE

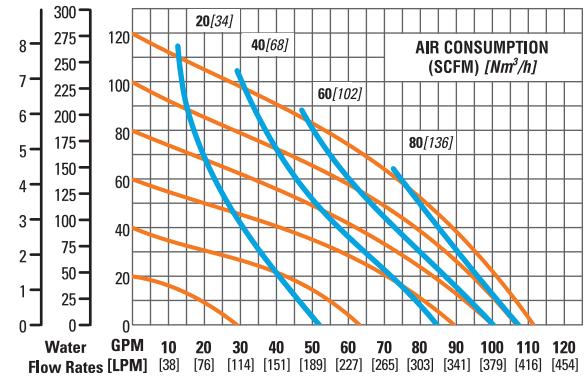


FULL-STROKE PTFE

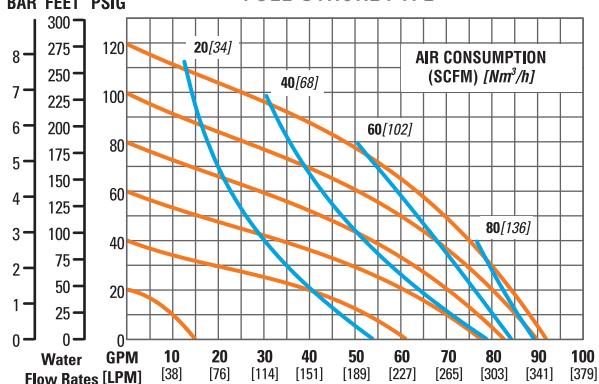

PTFE


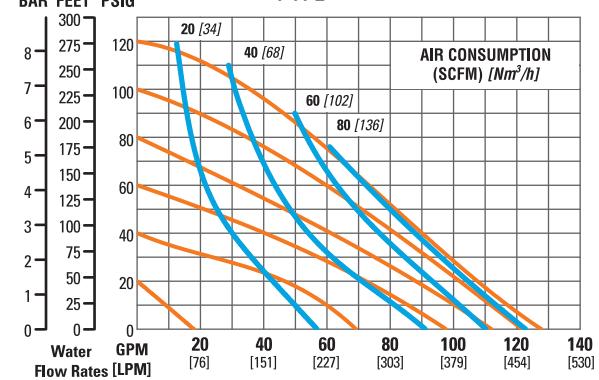


FULL-STROKE PTFE


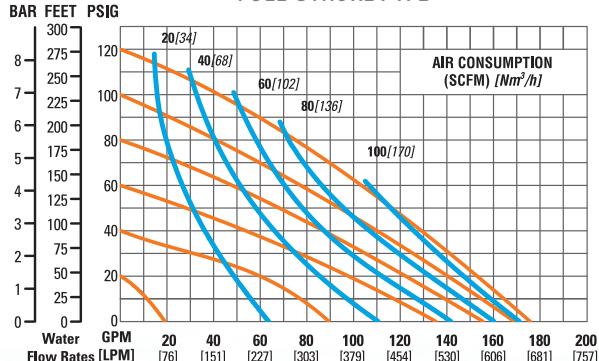


METAL CURVES



**PS820/
PS830**
51 mm (2")
ALUMINUM

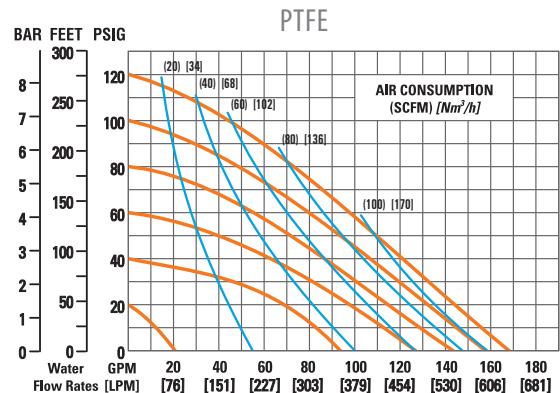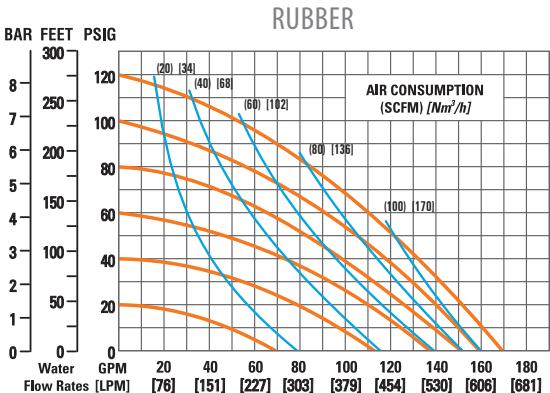



**PS820/
PS830**
51 mm (2")
STAINLESS STEEL

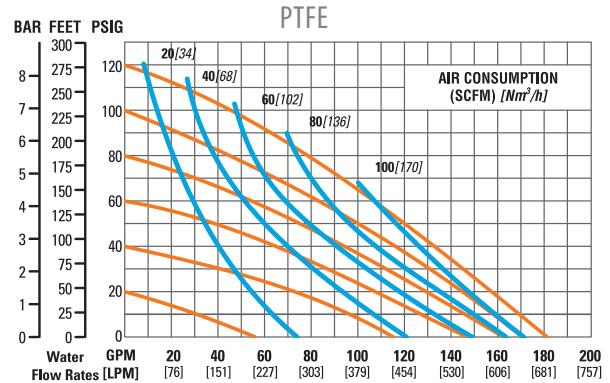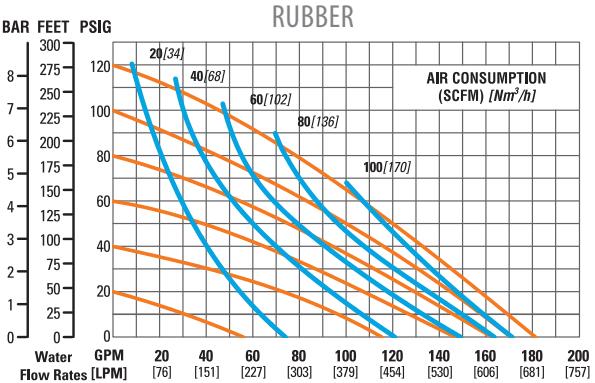

PS1500
76 mm (3")
ALUMINUM

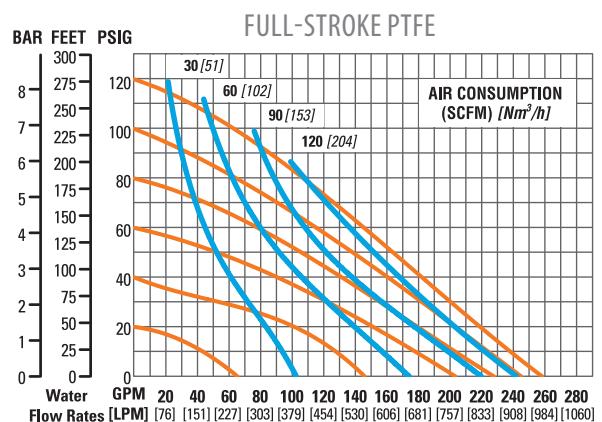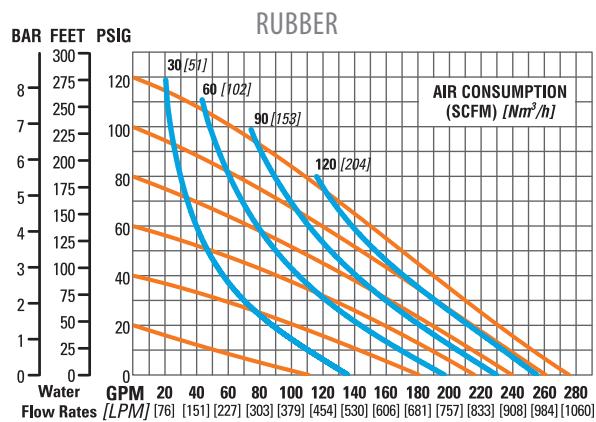


PS1500
76 mm (3")
STAINLESS STEEL

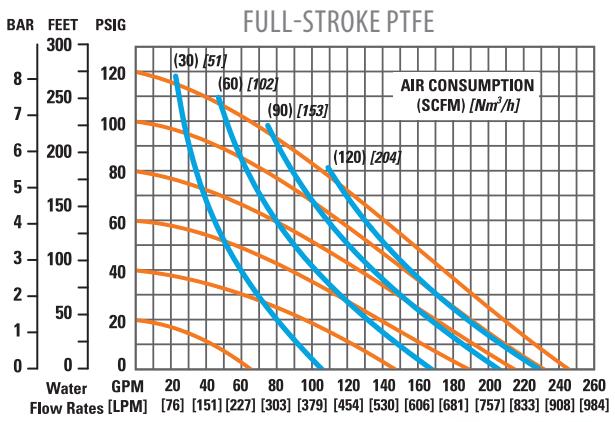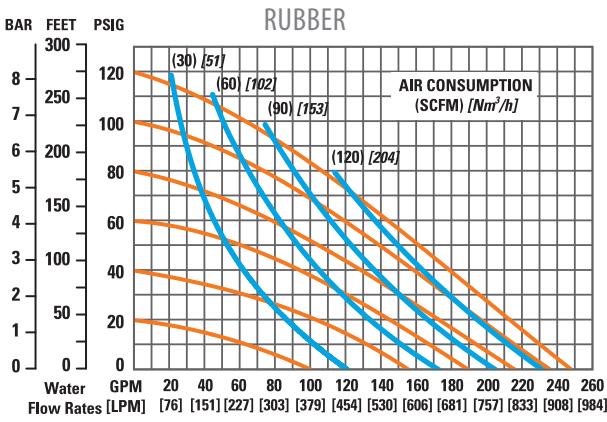


METAL CURVES


PS1520
76 mm (3")
ALUMINUM

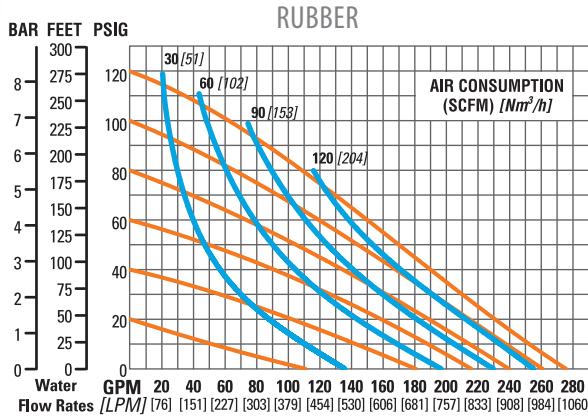


**PS1520/
PS1530**
76 mm (3")
STAINLESS STEEL

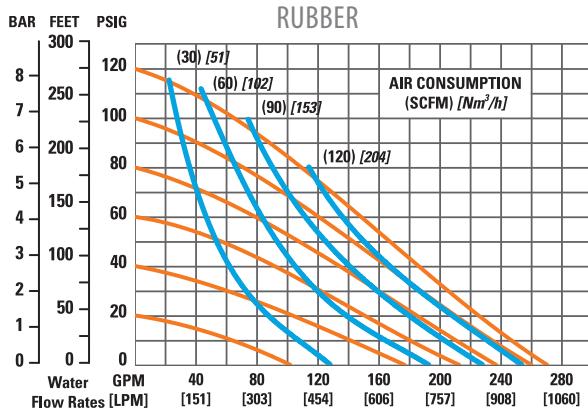





PX200
25 mm (1")
METAL

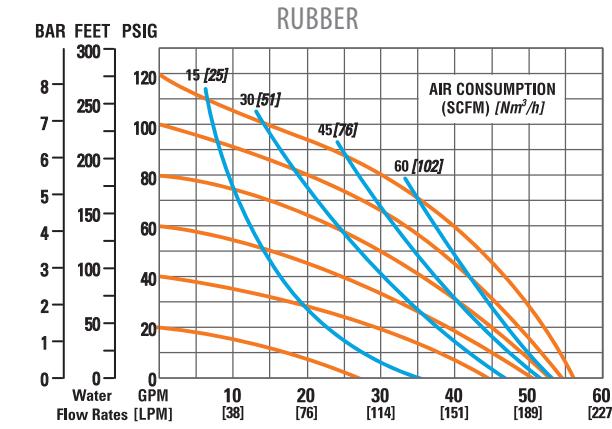

PX400
38 mm (1-1/2")
ALUMINUM

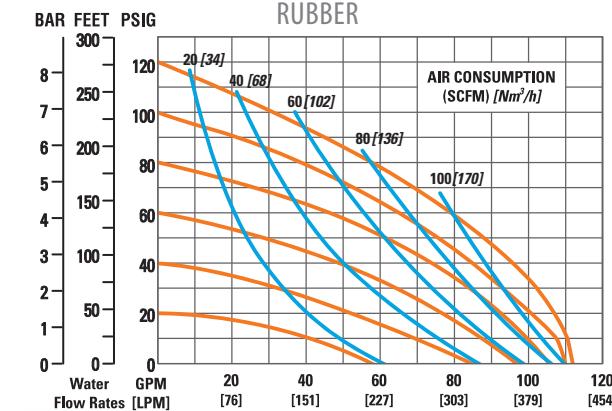



FULL-STROKE PTFE

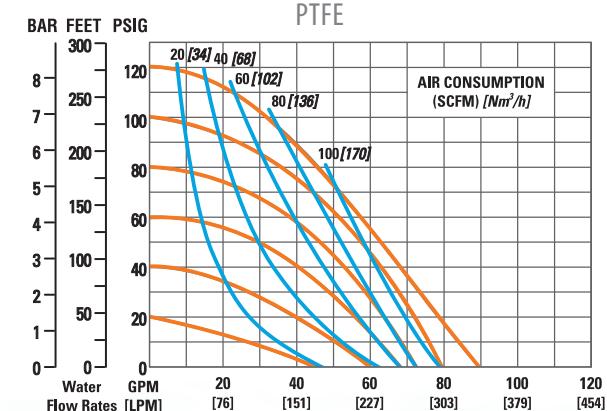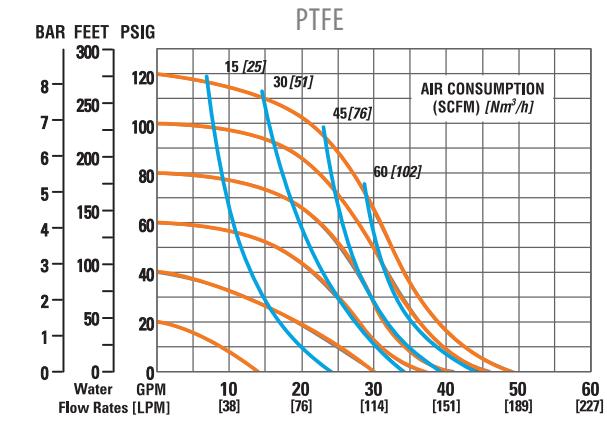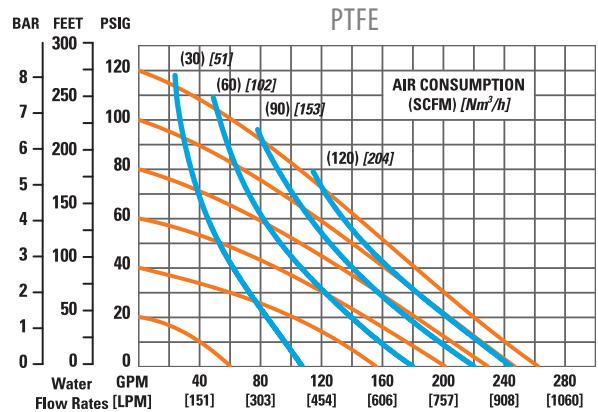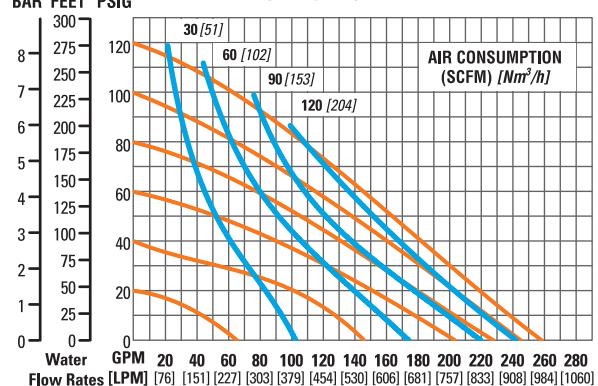

METAL CURVES



PX400

38 mm (1-1/2")
STAINLESS STEEL

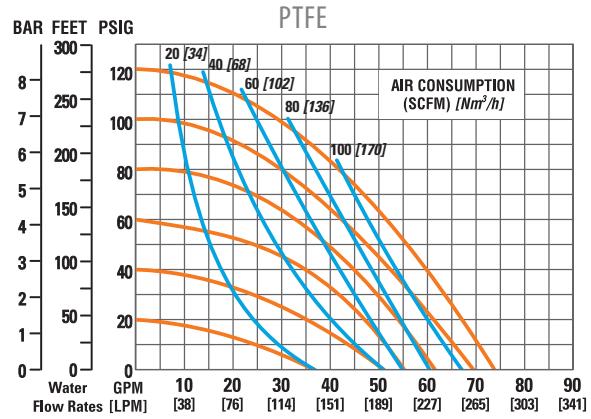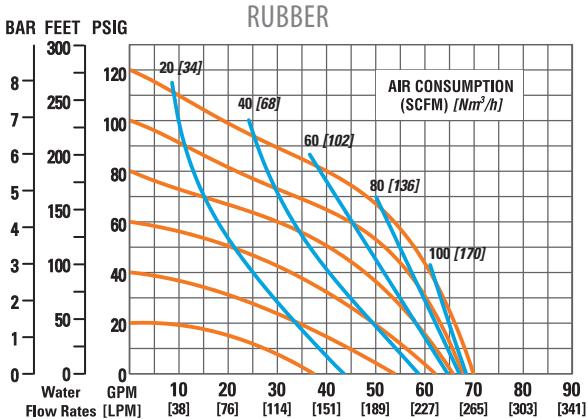



**PX420/
PX430**

38 mm (1-1/2")
STAINLESS STEEL

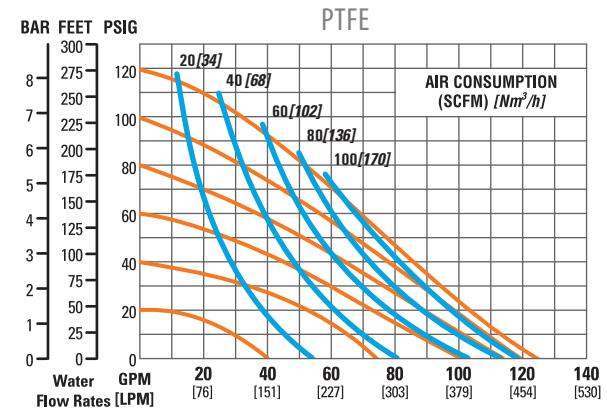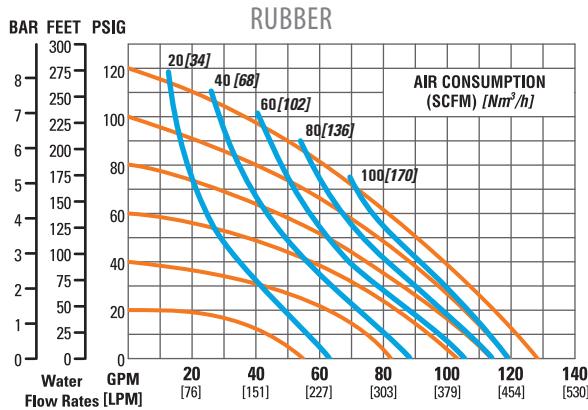



PX800

51 mm (2")
METAL

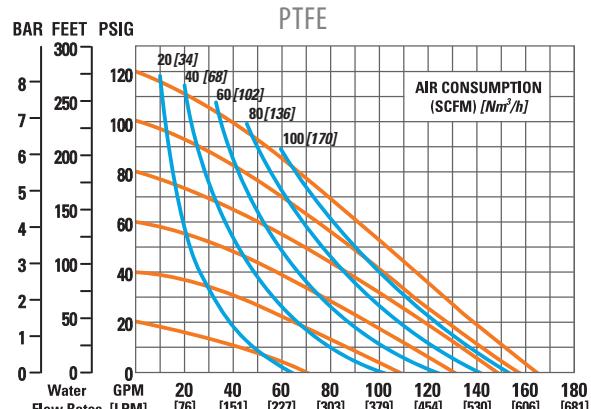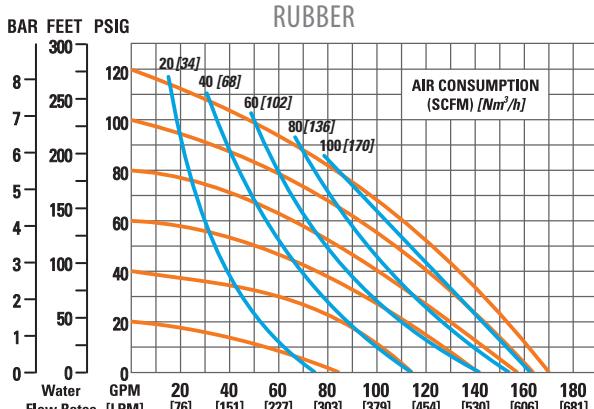


**PX820/
PX830**

51 mm (2")
ALUMINUM

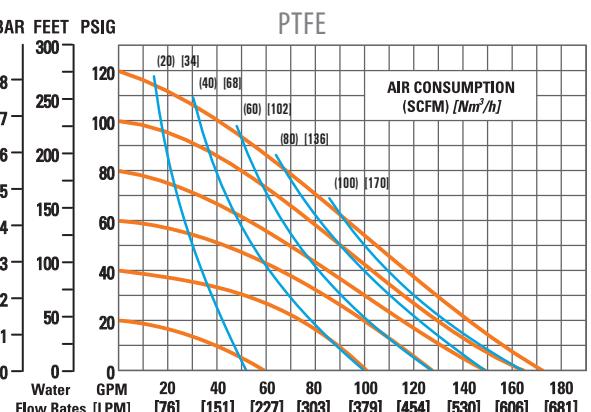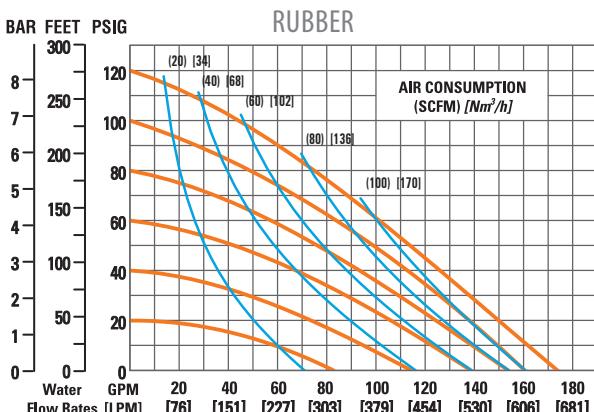


METAL CURVES


**PX820/
PX830**
51 mm (2")
STAINLESS STEEL

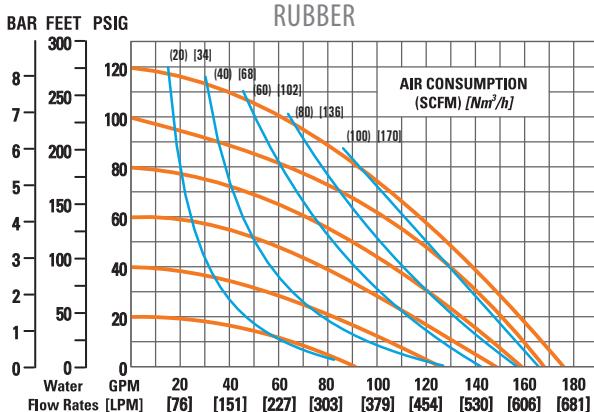






PX1500
76 mm (3")
ALUMINUM

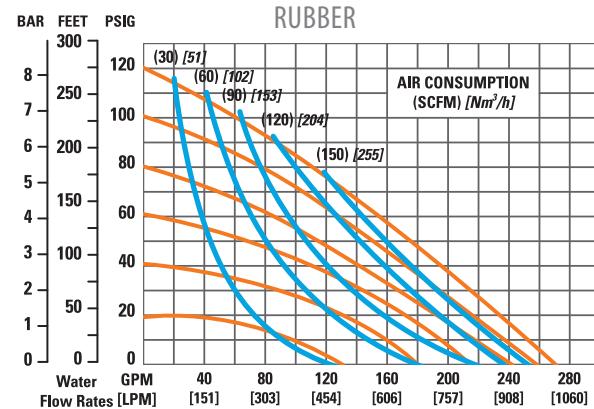

PX1500
76 mm (3")
STAINLESS STEEL


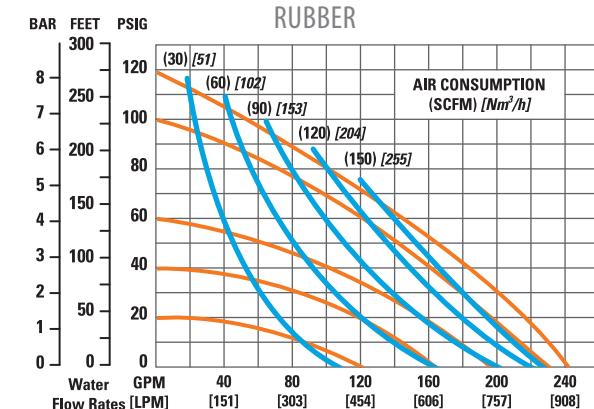


PX1520
76 mm (3")
ALUMINUM

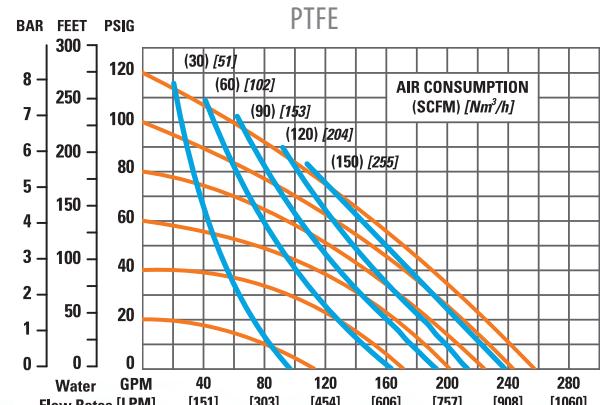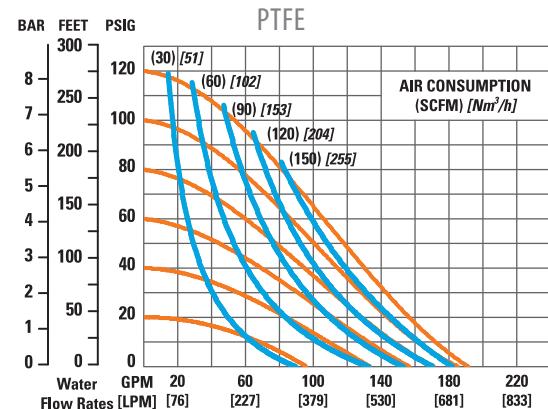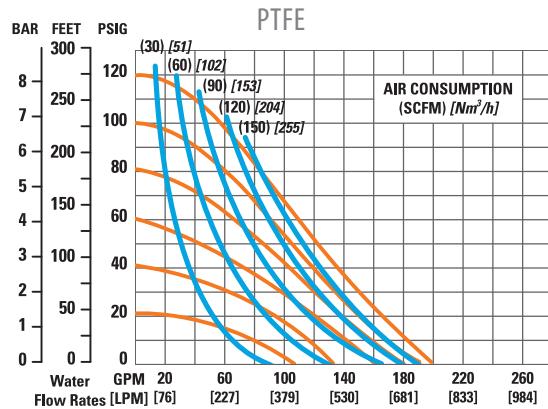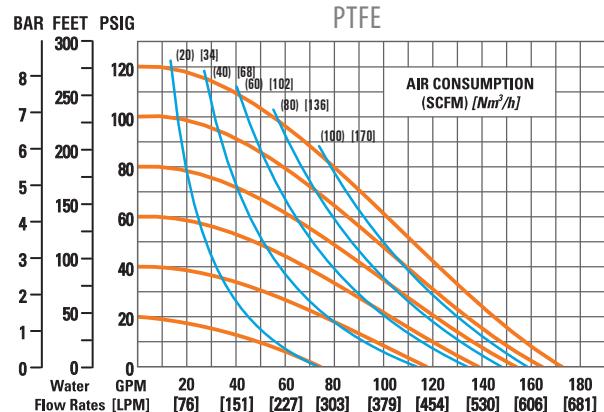
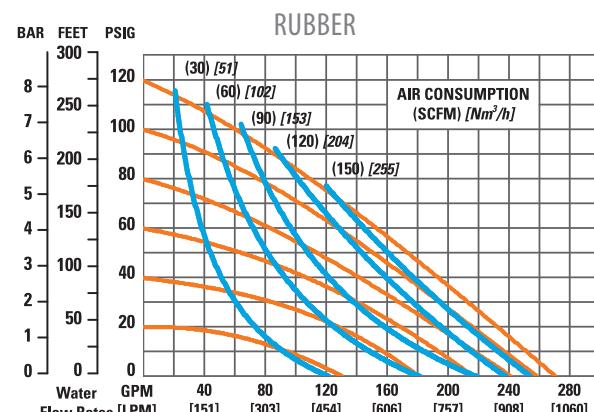


METAL CURVES



**PX1520/
PX1530**
76 mm (3")
STAINLESS STEEL

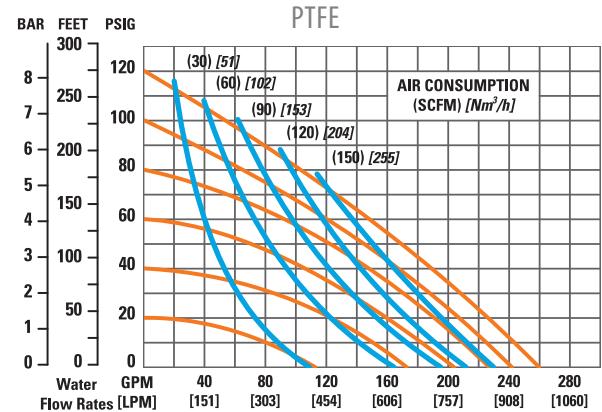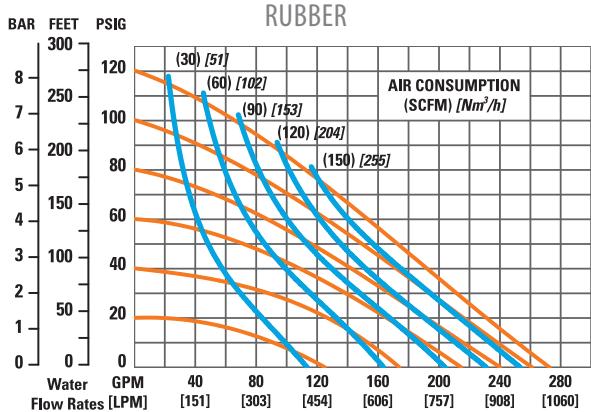



P200
25 mm (1")
METAL

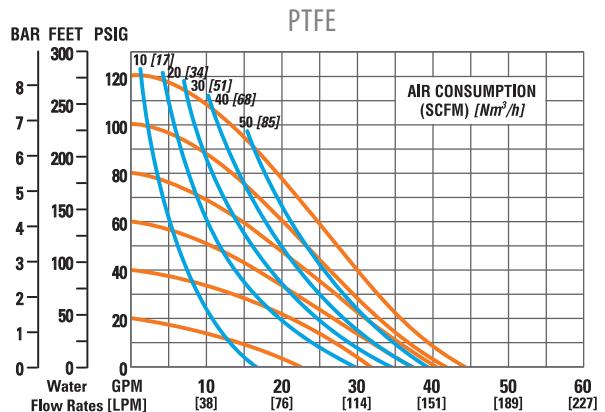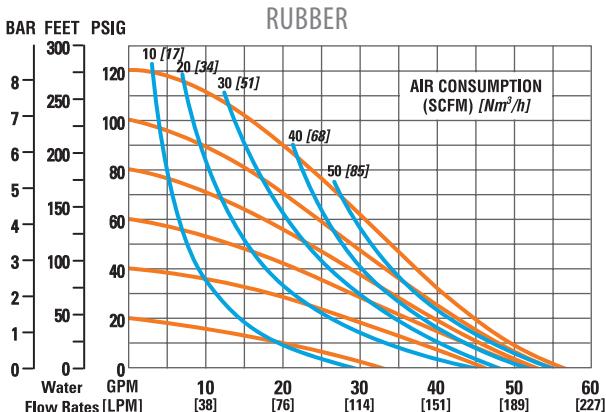

P400
38 mm (1-1/2")
ALUMINUM

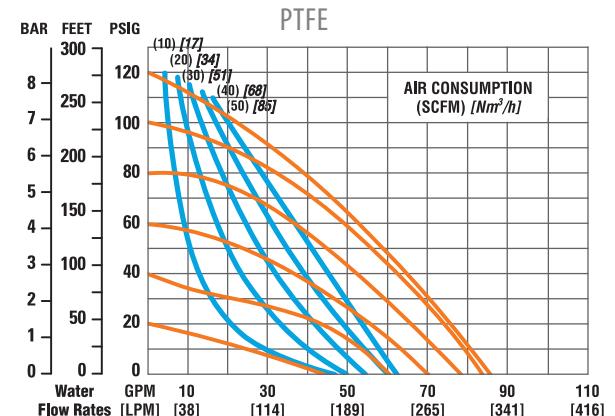
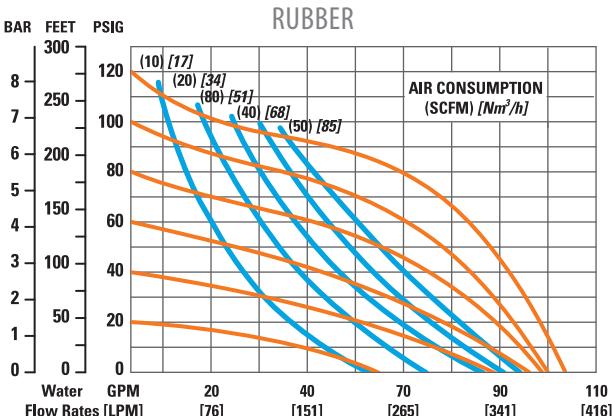


P400
38 mm (1-1/2")
STAINLESS STEEL

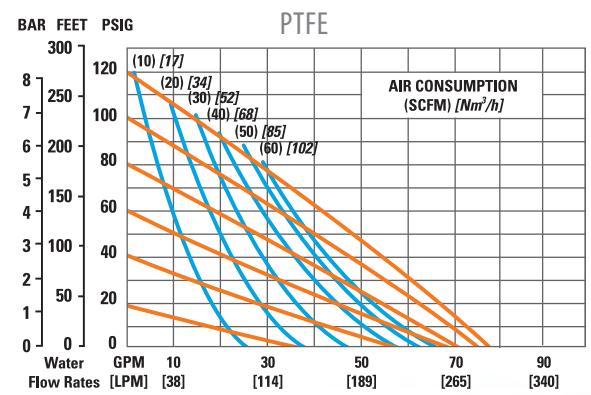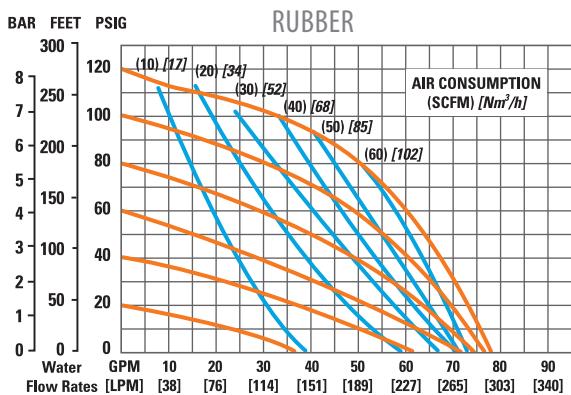


METAL CURVES (CONTINUED)


P800
51 mm (2")
METAL

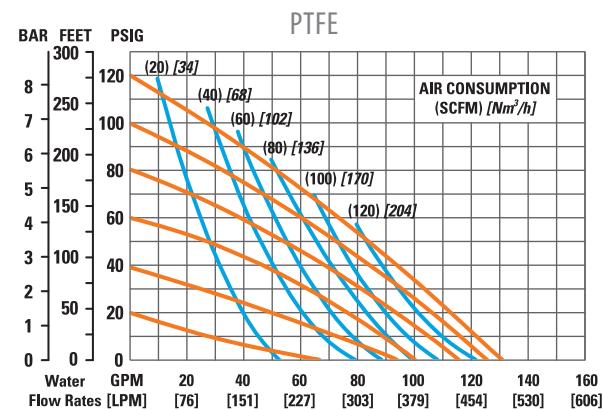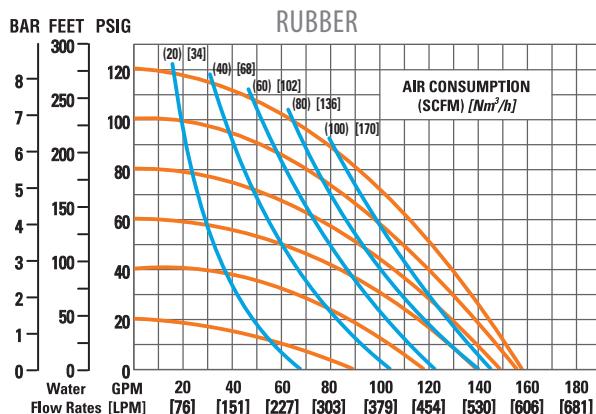


HIGH PRESSURE METAL CURVES

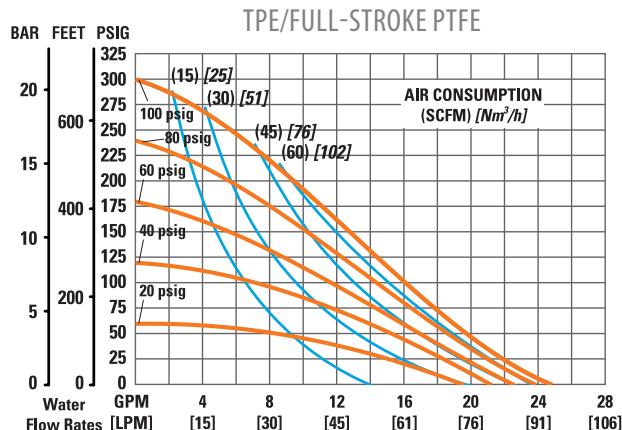


H200
25 mm (1")
METAL

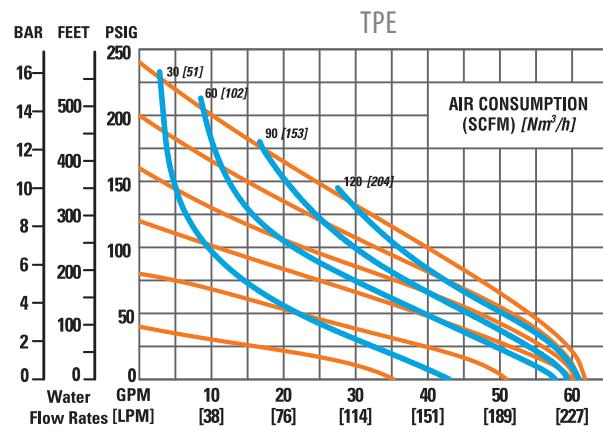

HX400S
38 mm (1-1/2")
ALUMINUM

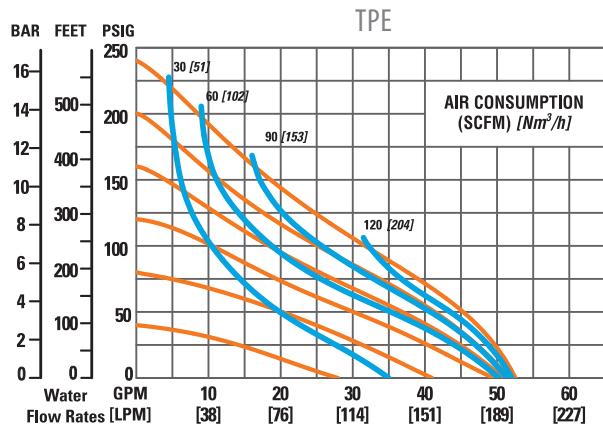


HX400S
38 mm (1-1/2")
STAINLESS STEEL

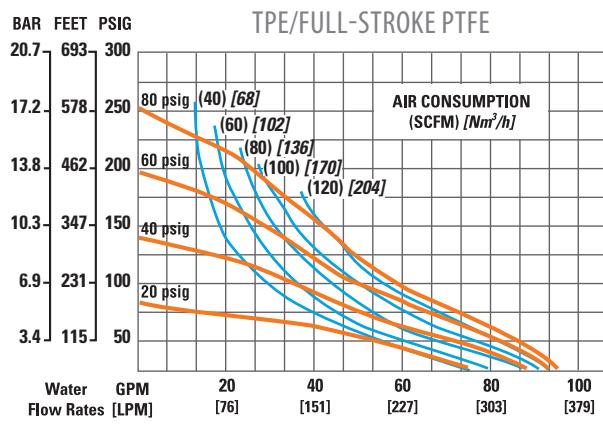


H800
51 mm (2")
ALUMINUM


BRAHMA METAL CURVES

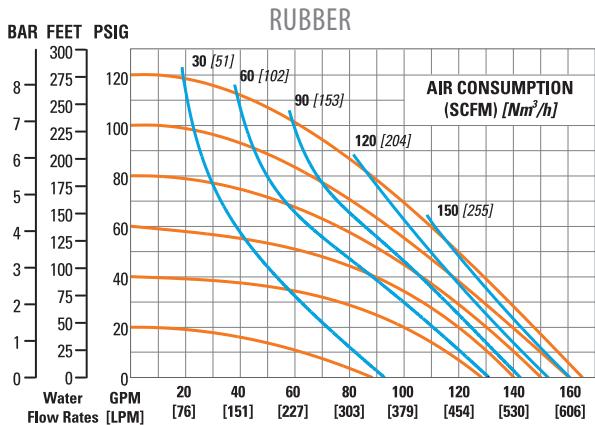


PX810
51 mm (2")
METAL

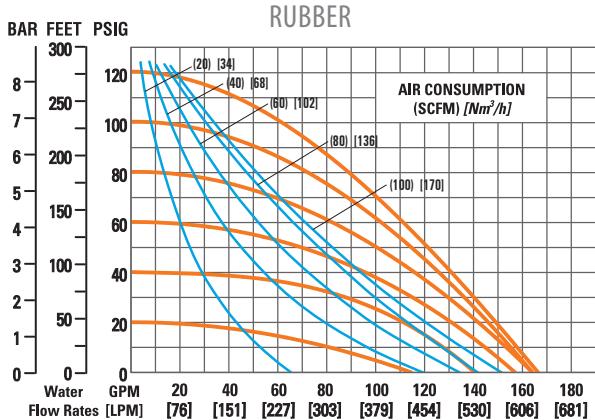

T810
51 mm (2")
METAL

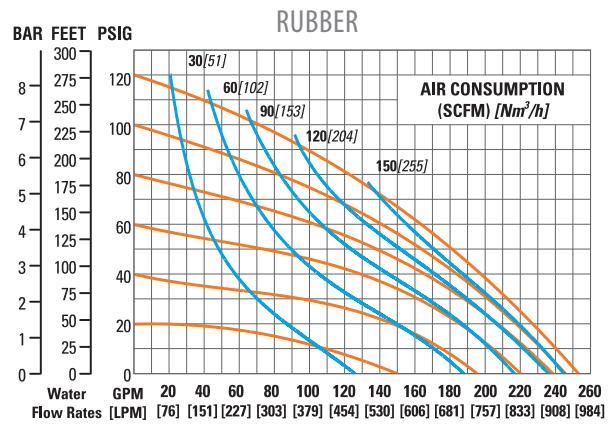

PX1510
76 mm (3")
METAL

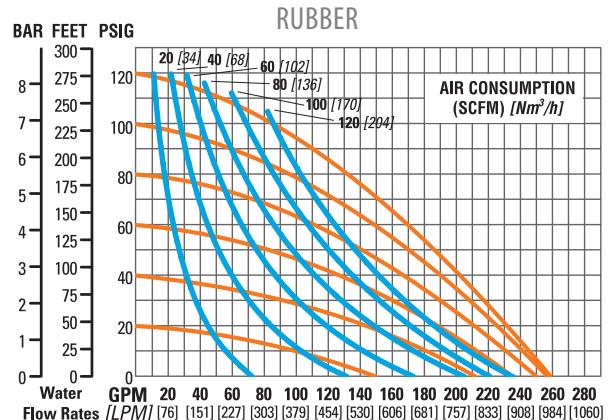

T1510
76 mm (3")
METAL



ADVANCED™ Plastic Bolted Pumps

Features

- ADS: Pro-Flo® SHIFT, Pro-Flo®, Pro-Flo X™, Accu-Flo™
- Superior flow rates
- Superior containment
- Anti-freezing technology
- Portable and submersible
- DIN (ANSI) liquid connections available
- Lube-free operation

Tech Data

- Sizes: 6 mm (1/4") through 76 mm (3")
- Materials: Polypropylene and PVDF
- Material Temperatures: Up to 107°C (225°F)
- Elastomers: Buna-N, Neoprene, EPDM, Viton®, Wil-Flex™, Saniflex™, Polyurethane, PTFE, Geolast®


Performance Data

- Max flow rates: 784 lpm (207 gpm)
- Max suction lift: 9.8 m (32.0') Wet, 6.6 m (21.6') Dry
- Max disp. Per Stroke: 3.75 L (0.99 gal)
- Max discharge pressure: 8.6 bar (125 psig)
- Max size solids: 12.7 mm (1/2")


PLASTIC CURVES

PS400

38 mm (1-1/2")
PLASTIC

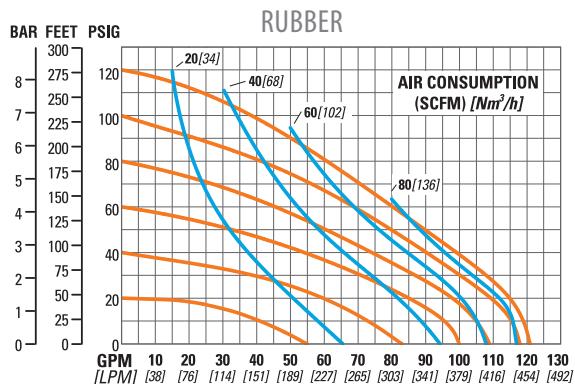


PTFE

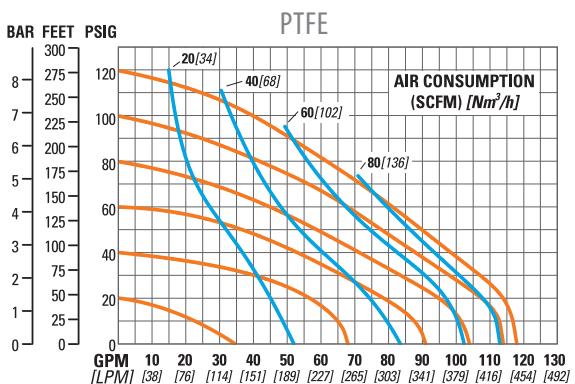


PS800

52 mm (2")
PLASTIC

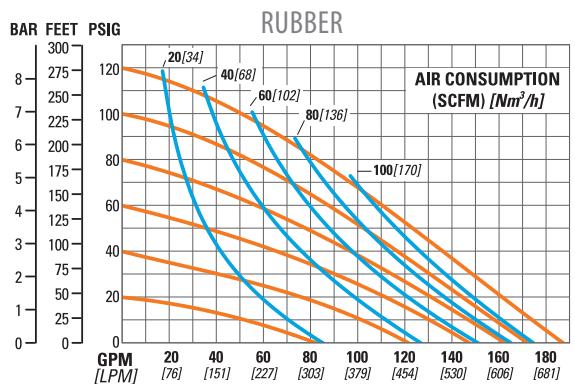


PTFE

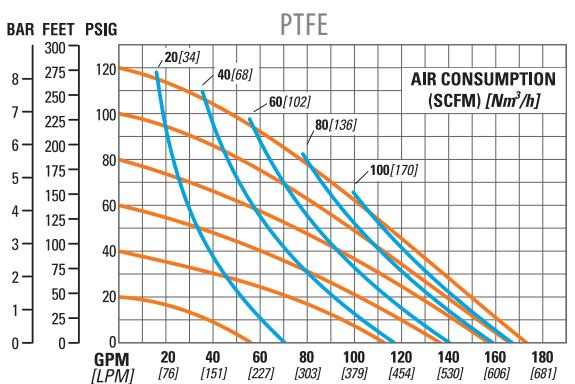


PS1500

76 mm (3")
PLASTIC

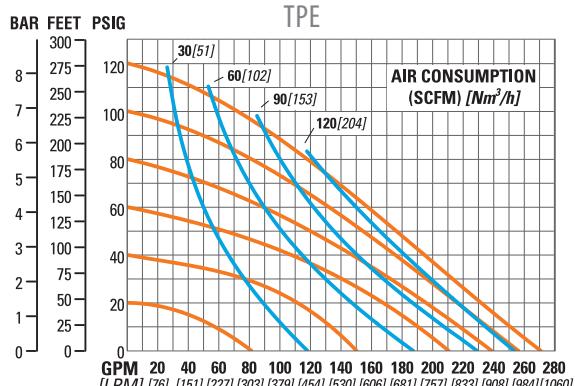


FULL-STROKE PTFE

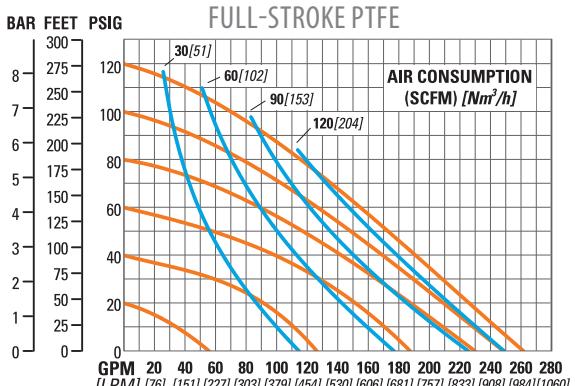


PX400

38 mm (1-1/2")
PLASTIC

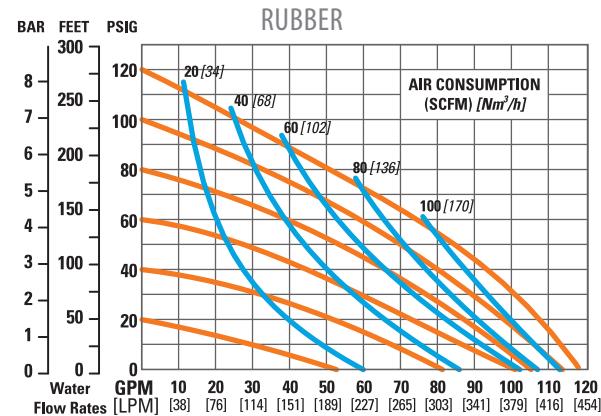


PTFE

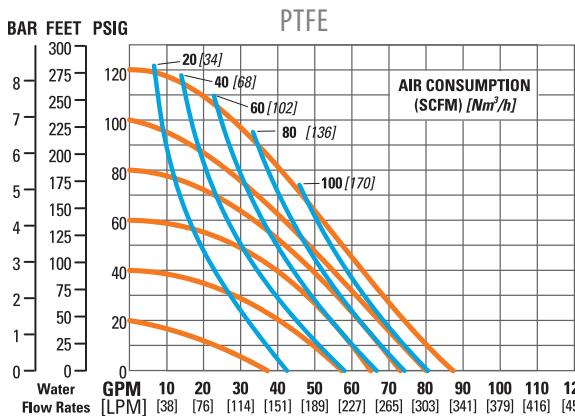


PLASTIC CURVES


PX800
51 mm (2")
PLASTIC

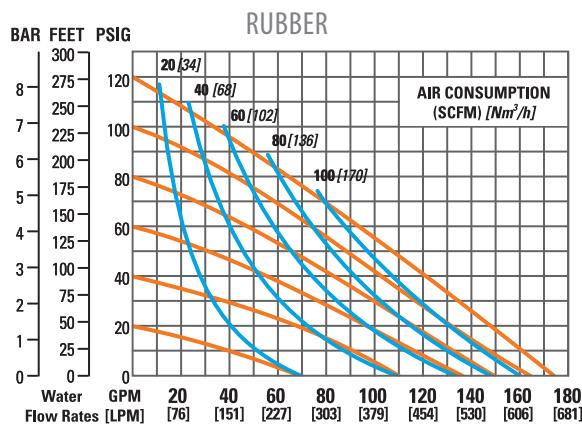






P25
6 mm (1/4")
PLASTIC

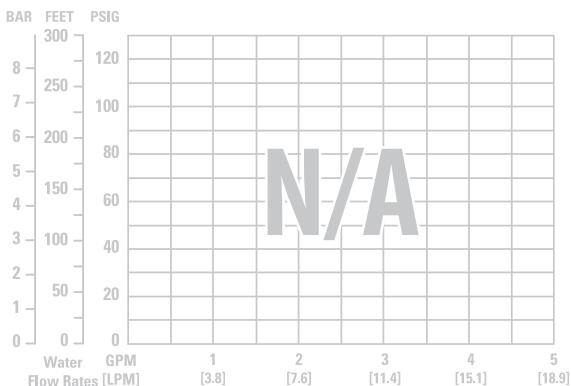

P100
13 mm (1/2")
PLASTIC

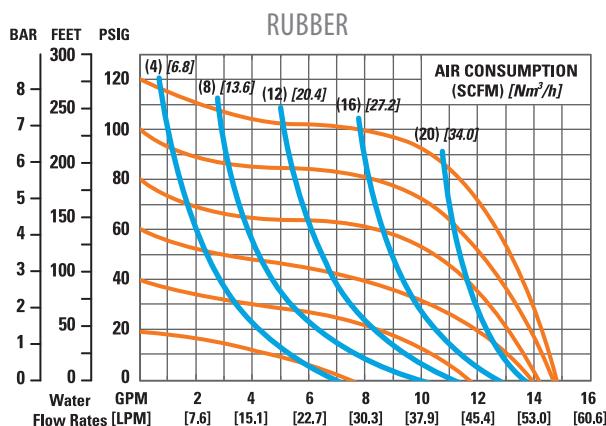


P200
25 mm (1")
PLASTIC

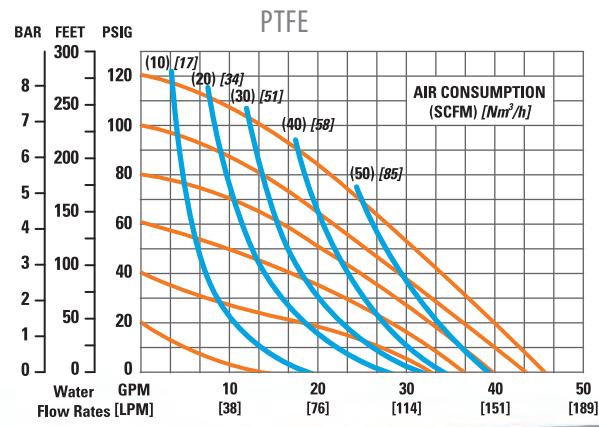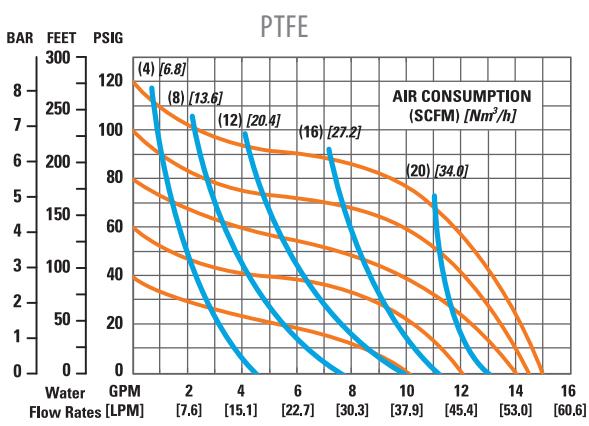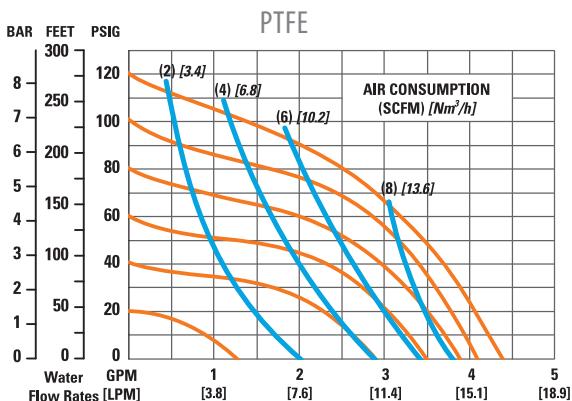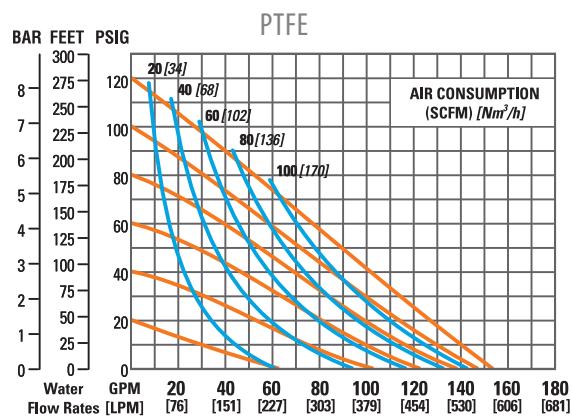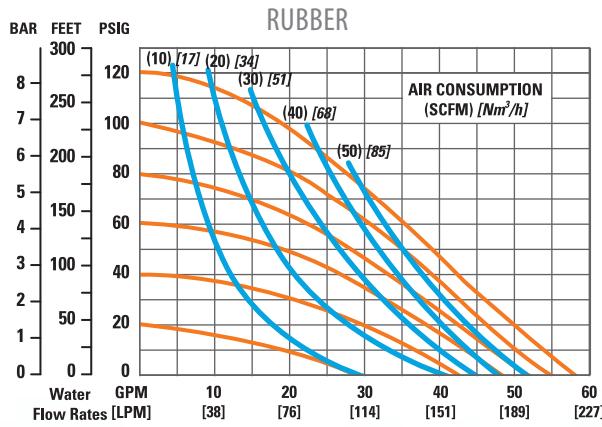


PLASTIC CURVES


P400
38 mm (1-1/2")
PLASTIC

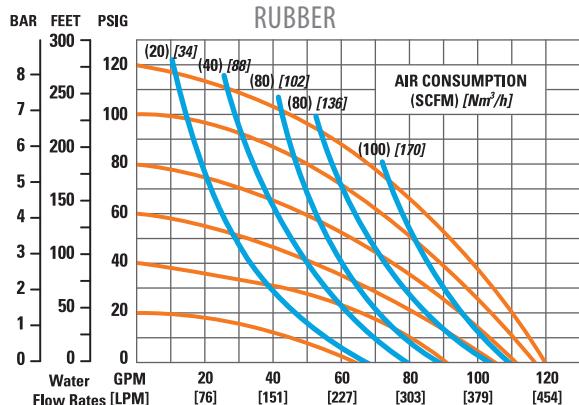






P800
51 mm (2")
PLASTIC

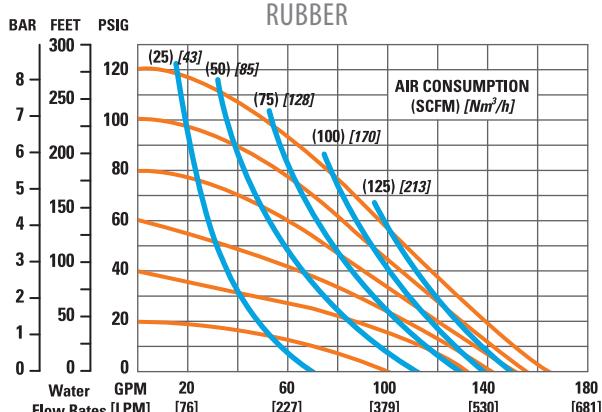

P1500
76 mm (3")
PLASTIC


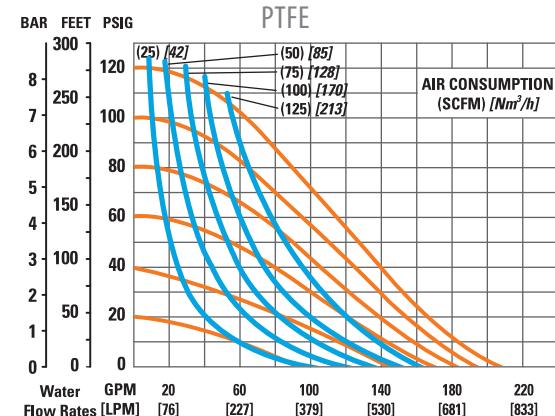


A100
13 mm (1/2")
PLASTIC

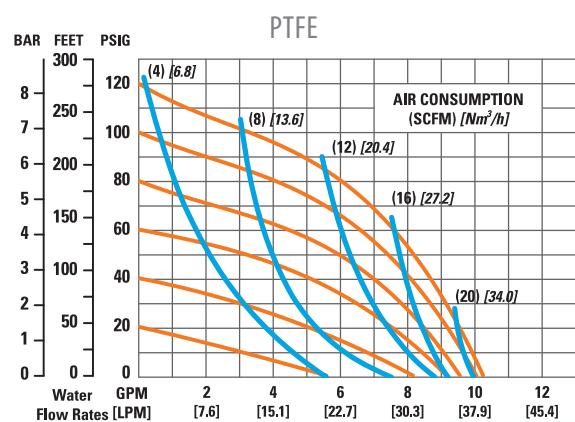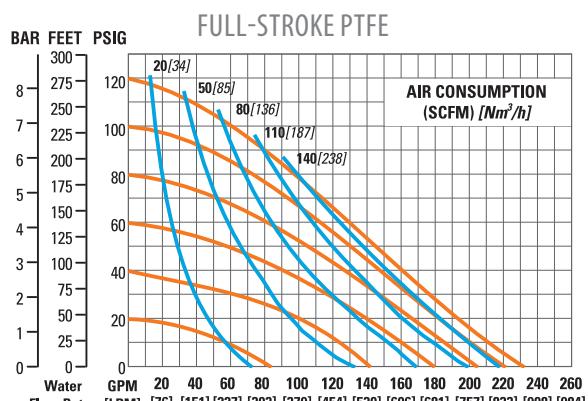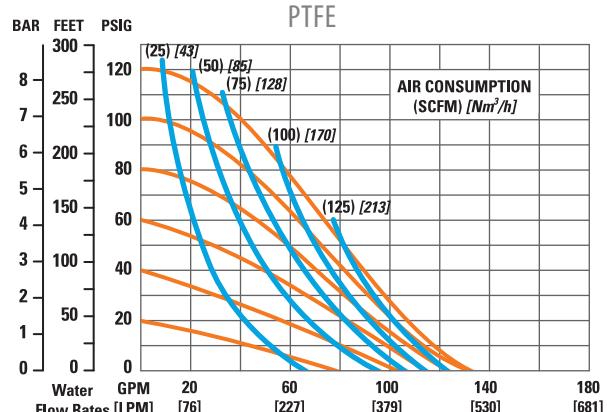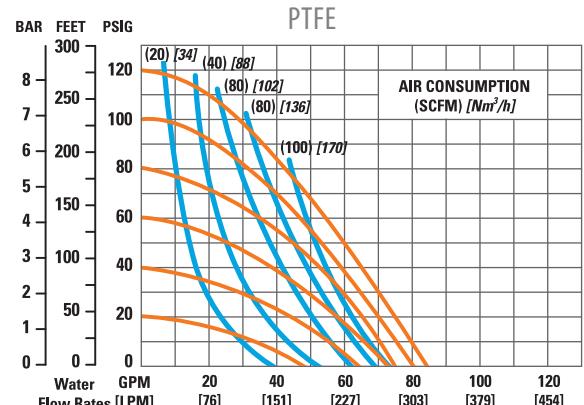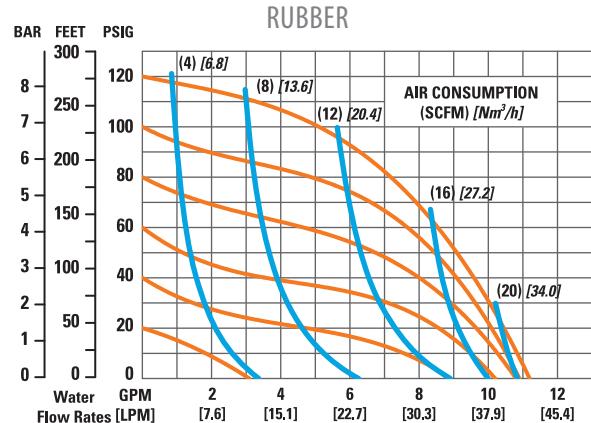

PLASTIC CURVES

A200P
25 mm (1")
PLASTIC

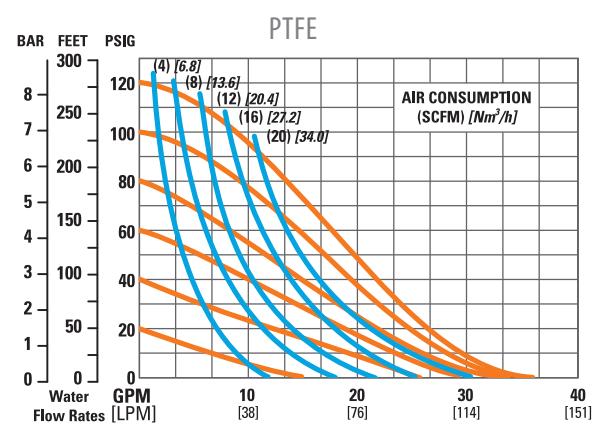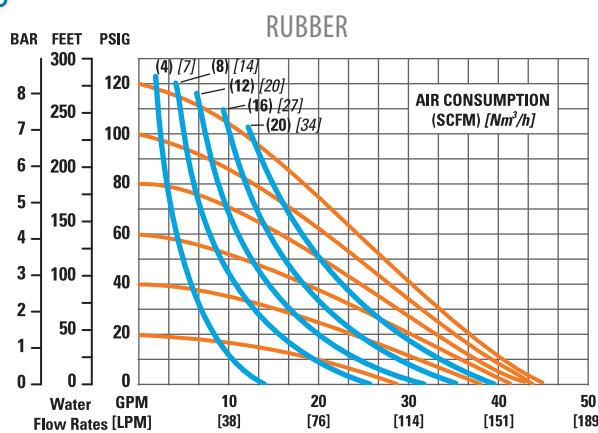

WILDEN SD Equalizer

The SD Equalizer® was designed to remove pressure variation on the discharge end of the pump. It has a flow-through design manufactured with existing Wilden pump parts. The SD series automatically sets and maintains the correct air pressure required, optimizing its effectiveness.

Features and Benefits:

- Reduces pipe vibration and shaking
- Protects in-line equipment
- Reduces water hammer
- Absorbs acceleration head
- Lowers system maintenance cost
- Suction stabilizer
- Helps prevent leaking at pipe fittings and joints
- Extends and improves pump performance
- Avoids damaging pressure surges
- Wide range of material and elastomer options
- Common parts with Wilden pumps
- Self adjusts to system pressure

Available Sizes:

- 13 mm (1/2")
- 25 mm (1")
- 38 mm (1-1/2")
- 51 mm (2")
- 76 mm (3")

Materials of Construction:

Wetted Housing

- Aluminum
- 316 and 316L Stainless Steel
- Ductile Iron
- Polypropylene
- PVDF

Air Distribution System


- Aluminum
- 316 Stainless Steel
- PTFE-Coated Ductile Iron
- Polypropylene
- Glass-filled Polypropylene
- Mild Steel PTFE-Coated

ATEX Models Available



Accessories

Wilden's accessory products add value to your liquid process and expand the application range of Wilden pumps by augmenting the performance and/or utility of the pump. Our electronic controllers automate your Wilden pump for batching and other electronically controlled dispensing applications. We can also create laminar process flow by eliminating pump pulsation or control the liquid level within a system of process.

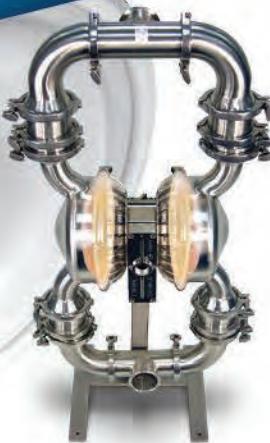

WILDEN Wil-Gard III

The Wil-Gard™ detects diaphragm failure at the source: the primary diaphragm, not at the air chamber or the air exhaust as other systems do.

- Sensors are located between the primary and back-up (containment) diaphragms
- When the sensors detect a conductive liquid, an audible alarm, LED and an internal latching relay are activated
- Increase containment, reduce fugitive emissions and reduce downtime with 24-hour pump surveillance
- Power requirement: 110V AC or 220V AC



WILDEN Pump Cycle Monitor

The PCMI counts pump cycles by sensing the presence of the air valve piston (Turbo-Flo™) or air valve spool (Pro-Flo®).

- The sensor, located at the air valve and cap, detects the presence of a magnet located at the end of the air valve piston/spool
- The PCMI registers a complete pump cycle when the piston/spool shifts away from the sensor and subsequently returns to the original position
- The PCMI unit has a reset switch located on the face of the PCMI module
- PCMI has the ability to be reset from a remote location



WILDEN Drum Pump Kit

The inherent features of the Wilden air-operated pump and Accu-Flo™ pump technology allow it to excel as a utilitarian drum pump. Various speed and pressure capability, the ability to run dry, self-prime and dead-head offers you flexibility at a low cost. The Wilden universal drum pump kit enables Wilden 1/4" and 1/2" pumps to adapt directly to drums for cost-effective, efficient liquid transfer.

- Universal kit for 6 mm (1/4") and 13 mm (1/2") pumps
- Fits 51 mm (2") NPT bungholes
- Tube length can be cut to length
- Variety of materials are available

Things to Think About

When Selecting an Air-Operated Double-Diaphragm (AODD) Pump

Application

- What application will the pump be used in?
- What are you pumping?
- Do you need lube-free operation?
- Does the pump need to be submersible?
- What cleaning fluids would be used to clean the pump?
- What are your performance parameters (flow rates, air consumption, viscosities, suction lift)?
- Do you need a pulsation dampener?

Air Distribution System (ADS)

- What ADS best suits your application needs?
- How reliable is the ADS?
- How efficient is the ADS?
- Do you need on/off reliability?
- Is the pump ADS ATEX-approved?
- Does the ADS have anti-freezing technology?
- Does the ADS have integrated variable performance controls?

Installation

- Before installation please read the caution section of the pump manual.
- What are your piping considerations (valves, elbows, pipe friction losses, etc.)?
- Do you have sufficient air pressure and air volume for the pump?
- What is the MTBR (Mean Time Between Repair) of the AODD?
- What are your installation parameters (self priming, positive suction head, high vacuum, heat generation, dry run capable, submersible, large solids passage, variable flow and pressure, shear sensitive)?
- Ease of maintenance: is the pump easy to clean, assemble/disassemble?

Wetted Materials

- What media will you be pumping?
- What is the chemical compatibility of the elastomer?
- What are the temperature limits of the wetted material and elastomer?
- How abrasive is the media being pumped?
- Do diaphragm configurations affect flow?

Distributors

- Is your distributor local?
- Can the distributor fully support your fluid transfer needs?
- Are they a full-stocking, full-service distributor?
- How good is delivery? Is it less than 3 weeks?
- Is the distributor formally educated in specifying and maintaining your system?
- How are the services and repair capabilities of the distributor?
- Does the distributor do local training for your staff?
- How responsive is the distributor to your needs?

Resources

- www.wildenpump.com
- Locating your Authorized Wilden Distributor: www.wildendistributor.com
- Engineering, Operations and Maintenance Manuals: [www.wildenpump.com > Support > Manuals \(EOMs\)](http://www.wildenpump.com > Support > Manuals (EOMs))
- Cavitation and Friction Guide & Safety Supplement: www.wildenpump.com > Support > Literature
- Electronic Chemical Resistance Guide: www.wildenpump.com > Support > Chemical Guide
- Troubleshooting: www.wildenpump.com in the Support section (Troubleshooting)

WILDEN TECHNICAL SUPPORT: Hours of operation: 8:00 am – 5:00 pm (PST)
Ph. 1-909-422-1730 • E-mail: techsupport@wildenpump.com

METAL TECHNICAL SPECS

SIZING CONSIDERATIONS

| MODELS | WETTED MATERIALS | LIQUID INLET | LIQUID DISCHARGE | CONNECTION TYPE | | | | HEIGHT | WIDTH | DEPTH |
|----------------------------|------------------|-------------------------------------|------------------|-----------------|----------|-----------------|--|-----------------|----------------|----------------|
| | | | | BSPT/NPT | DIN/ANSI | SHIPPING WEIGHT | | | | |
| PRO-FLO® SHIFT ADVANCED | PS400 | Aluminum | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 33 kg (72 lb) | 594 mm (23.4") | 343 mm (13.5") | 308 mm (12.1") |
| | PS400 | Stainless Steel Alloy C | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 43 kg (94 lb) 45 kg (100 lb) | 530 mm (20.8") | 381 mm (15.1") | 308 mm (12.1") |
| | PS420 | Stainless Steel | 38 mm (1-1/2") | 38 mm (1-1/2") | • | - | 50 kg (111 lb) | 429 mm (16.9") | 442 mm (17.4") | 308 mm (12.1") |
| | PS430 | Stainless Steel | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 53 kg (116 lb) | 528 mm (20.8") | 442 mm (17.4") | 308 mm (12.2") |
| | PS800 | Aluminum Stainless Steel Alloy C | 51 mm (2") | 51 mm (2") | - | • | 38 kg (83 lb) 89 kg (195 lb) 107 kg (236 lb) | 759 mm (29.9") | 439 mm (17.3") | 338 mm (13.3") |
| | PS820 | Aluminum | 51 mm (2") | 51 mm (2") | • | - | 47 kg (104 lb) | 670 mm (26.4") | 452 mm (17.8") | 354 mm (13.9") |
| | PS820 | Stainless Steel | 51 mm (2") | 51 mm (2") | • | - | 73 kg (161 lb) | 658 mm (25.9") | 452 mm (17.8") | 353 mm (13.9") |
| | PS830 | Aluminum | 51 mm (2") | 51 mm (2") | - | • | 54 kg (118 lb) | 752 mm (29.8") | 452 mm (17.9") | 354 mm (13.9") |
| | PS830 | Stainless Steel | 51 mm (2") | 51 mm (2") | - | • | 81 kg (178 lb) | 754 mm (29.7") | 452 mm (17.8") | 353 mm (13.9") |
| | PS1500 | Aluminum | 76 mm (3") | 76 mm (3") | - | • | 101 kg (223 lb) | 1031 mm (40.6") | 615 mm (24.2") | 389 mm (15.3") |
| | PS1500 | Stainless Steel Alloy C | 76 mm (3") | 76 mm (3") | - | • | 125 kg (275 lb) 130 kg (287 lb) | 892 mm (35.1") | 541 mm (21.3") | 421 mm (16.6") |
| | PS1520 | Aluminum | 76 mm (3") | 76 mm (3") | • | - | 69 kg (152 lb) | 818 mm (32.2") | 635 mm (25.0") | 421 mm (16.6") |
| | PS1520 | Stainless Steel | 76 mm (3") | 76 mm (3") | • | - | 126 kg (278 lb) | 815 mm (32.1") | 659 mm (26.0") | 420 mm (16.6") |
| | PS1530 | Stainless Steel | 76 mm (3") | 76 mm (3") | - | • | 137 kg (300 lb) | 890 mm (35.1") | 659 mm (26.0") | 420 mm (16.6") |



PERFORMANCE

MAX. SUCTION LIFT

| MAX. DISCHARGE PRESSURE | MAX. SOLIDS PASSAGE | RUBBER/TPE | | PTFE | | MAX. FLOW | |
|-------------------------------|---------------------------|------------------|------------------|------------------|------------------|-----------------------|----------------------|
| | | DRY | WET | DRY | WET | RUBBER/TPE | PTFE |
| 8.6 bar (125 psig) | 4.8 mm (3/16") | 5.7 m (18.7') | 8.6 m (28.4') | 5.7 m (18.7') | 8.6 m (28.4') | 443 lpm (117 gpm) | 424 lpm (112 gpm) |
| 8.6 bar (125 psig) | 4.8 mm (3/16") | 6.9 m (22.7') | 8.6 m (28.4') | 6.7 m (22.1') | 8.6 m (28.4') | 279 lpm (74 gpm) | 348 lpm (92 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.5 m (17.9') | 9.6 m (30.6') | 3.5 m (11.4') | 9.0 m (29.5') | 507 lpm (134 gpm) | 485 lpm (128 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.5 m (17.9') | 9.6 m (30.6') | 3.5 m (11.4') | 9.0 m (29.5') | 507 lpm (134 gpm) | 485 lpm (128 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.4 m (21.0') | 8.6 m (28.4') | 5.9 m (19.5') | 8.6 m (28.4') | 697 lpm (184 gpm) | 662 lpm (175 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.5 m (21.8') | 9.0 m (29.5') | 6.1 m (20.0') | 9.0 m (29.5') | 704 lpm (186 gpm) | 673 lpm (178 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 7.1 m (23.3') | 8.6 m (28.4') | 6.4 m (21.0') | 8.6 m (28.4') | 704 lpm (186 gpm) | 678 lpm (179 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.5 m (21.8') | 9.0 m (29.5') | 6.1 m (20.0') | 9.0 m (29.5') | 704 lpm (186 gpm) | 673 lpm (178 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 7.1 m (23.3') | 8.6 m (28.4') | 6.4 m (21.0') | 8.6 m (28.4') | 704 lpm (186 gpm) | 678 lpm (179 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 7.2 m (23.8') | 9.0 m (29.5') | 6.2 m (20.2') | 8.6 m (28.4') | 1045 lpm (276 gpm) | 977 lpm (258 gpm) |
| 8.6 bar (125 psig) | 9.5 mm (3/8") | 6.4 m (21.0') | 8.6 m (28.4') | 4.9 m (19.5') | 8.6 m (28.4') | 939 lpm (248 gpm) | 931 lpm (246 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 7.2 m (23.8') | 9.0 m (29.5') | 6.2 m (20.2') | 8.6 m (28.4') | 1045 lpm (276 gpm) | 977 lpm (258 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 6.0 m (19.7') | 8.6 m (28.4') | 5.9 m (19.3') | 8.6 m (28.4') | 1056 lpm (279 gpm) | 992 lpm (262 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 6.0 m (19.7') | 8.6 m (28.4') | 5.9 m (19.3') | 8.6 m (28.4') | 1056 lpm (279 gpm) | 992 lpm (262 gpm) |

**PRO-FLO® SHIFT
ADVANCED**

METAL TECHNICAL SPECS

SIZING CONSIDERATIONS

CONNECTION TYPE

| MODELS | WETTED MATERIALS | LIQUID INLET | LIQUID DISCHARGE | BSPT/NPT | DIN/ANSI | SHIPPING WEIGHT | HEIGHT | WIDTH | DEPTH | |
|---------------------|------------------|---|-------------------|-------------------|----------|-----------------|--|---------------------|-------------------|-------------------|
| PRO-FLO X® ADVANCED | PX200 | Aluminum Stainless Steel Ductile Iron | 25 mm (1") | 25 mm (1") | - | • | 15 kg (34 lb) 28 kg (61 lb) 26 kg (57 lb) | 340 mm (13.4") | 378 mm (14.7") | 244 mm (9.6") |
| | PX400 | Aluminum Alloy C Stainless Steel | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 33 kg (72 lb) 45 kg (100 lb) 43 kg (94 lb) | 594 mm (24.3") | 343 mm (13.5") | 310 mm (12.2") |
| | PX420 | Stainless Steel | 38 mm (1-1/2") | 38 mm (1-1/2") | • | - | 50 kg (111 lb) | 445 mm (17.5") | 444 mm (17.4") | 518 mm (20.4") |
| | PX430 | Stainless Steel | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 53 kg (116 lb) | 445 mm (17.5") | 444 mm (17.4") | 518 mm (20.4") |
| | PX800 | Aluminum Alloy C Stainless Steel Cast Iron | 51 mm (2") | 51 mm (2") | - | • | 35 kg (78 lb) 54 kg (119 lb) 53 kg (117 lb) | 760 mm (29.9") | 439 mm (17.3") | 493 mm (19.4") |
| | PX810 | Aluminum Ductile Iron | 51 mm (2") | 51 mm (2") | | | 37 kg (81 lb) 57 kg (125 lb) | 508 mm (20.0") | 554 mm (21.8") | 343 mm (13.5") |
| | PX820 | Aluminum | 51 mm (2") | 51 mm (2") | • | - | 47 kg (104 lb) | 670 mm (26.4") | 452 mm (17.8") | 353 mm (14.0") |
| | PX820 | Stainless Steel | 51 mm (2") | 51 mm (2") | • | - | 73 kg (161 lb) | 658 mm (15.9") | 452 mm (17.8") | 356 mm (14.0") |
| | PX830 | Aluminum | 51 mm (2") | 51 mm (2") | - | • | 54 kg (118 lb) | 752 mm (29.6") | 452 mm (17.8") | 353 mm (14.0") |
| | PX830 | Stainless Steel | 51 mm (2") | 51 mm (2") | - | • | 81 kg (178 lb) | 760 mm (29.9") | 452 mm (17.8") | 356 mm (14.0") |
| | PX1500 | Aluminum Alloy C Stainless Steel | 76 mm (3") | 76 mm (3") | - | • | 83 kg (182 lb) 130 kg (287 lb) 125 kg (275 lb) | 1,031 mm (40.6") | 615 mm (24.2") | 422 mm (16.6") |
| | PX1510 | Aluminum Ductile Iron | 76 mm (3") | 76 mm (3") | - | - | 81 kg (177 lb) 159 kg (349 lb) | 754 mm (29.7") | 874 mm (34.4") | 411 mm (16.2") |
| | PX1520 | Aluminum | 76 mm (3") | 76 mm (3") | • | - | 70 kg (152 lb) | 1,031 mm (40.6") | 615 mm (24.2") | 422 mm (16.6") |
| | PX1520 | Stainless Steel | 76 mm (3") | 76 mm (3") | • | - | 126 kg (278 lb) | 815 mm (32.1") | 650 mm (25.6") | 422 mm (16.6") |
| | PX1530 | Stainless Steel | 76 mm (3") | 76 mm (3") | - | • | 137 kg (300 lb) | 896 mm (35.3") | 650 mm (25.6") | 422 mm (16.6") |



PERFORMANCE

MAX. SUCTION LIFT

| MAX. DISCHARGE PRESSURE | MAX. SOLIDS PASSAGE | RUBBER/TPE | | PTFE | | MAX. FLOW | |
|-------------------------------|---------------------------|------------------|------------------|------------------|------------------|------------------------|----------------------|
| | | DRY | WET | DRY | WET | RUBBER/TPE | PTFE |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.9 m (19.3') | 9.0 m (29.5') | 4.3 m (14.2') | 9.0 m (29.5') | 212 lpm (56 gpm) | 185 lpm (49 gpm) |
| 8.6 bar (125 psig) | 7.9 mm (5/16") | 6.9 m (22.7') | 9.0 m (29.5') | 6.9 m (22.7') | 9.3 m (30.6') | 424 lpm (112 gpm) | 413 lpm (109 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.9 m (19.5') | 9.3 m (30.6') | 5.1 m (16.8') | 9.3 m (30.6') | 507 lpm (134 gpm) | 469 lpm (124 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.9 m (19.5') | 9.3 m (30.6') | 5.1 m (16.8') | 9.3 m (30.6') | 507 lpm (134 gpm) | 469 lpm (124 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.4 m (21') | 8.6 m (28.4') | 6.1 m (19.9') | 8.6 m (28.4') | 654 lpm (173 gpm) | 674 lpm (174 gpm) |
| 8.6 bar (125 psig) | 51 mm (2") | 8.0 m (26.1') | 9.3 m (30.6') | - | - | 628 lpm (166 gpm) | - |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.9 m (22.7') | 8.7 m (28.4') | 6.2 m (20.4') | 9.0 m (29.5') | 658 lpm (174 gpm) | 650 lpm (172 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.6 m (21.8') | 9.0 m (29.5') | 6.6 m (21.6') | 8.6 m (28.4') | 712 lpm (188 gpm) | 653 lpm (172 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.9 m (22.7') | 8.7 m (28.4') | 6.2 m (20.4') | 9.0 m (29.5') | 658 lpm (174 gpm) | 650 lpm (172 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.6 m (21.8') | 9.0 m (29.5') | 6.6 m (21.6') | 8.6 m (28.4') | 712 lpm (188 gpm) | 653 lpm (172 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 6.7 m (22.1') | 9.5 m (31.2') | 6.4 m (21') | 9.0 m (29.5') | 1,021 lpm (270 gpm) | 974 lpm (257 gpm) |
| 8.6 bar (125 psig) | 76 mm (3") | 7.4 m (24.4') | 9.0 m (29.5') | - | - | 958 lpm (253 gpm) | - |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 6.6 m (21.7') | 8.8 m (28.9') | 6.4 m (21.0') | 9.0 m (29.5') | 1021 lpm (270 gpm) | 974 lpm (257 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 6.2 m (20.4') | 9.2 m (30.1') | 6.1 m (19.9') | 9.3 m (30.6') | 1030 lpm (272 gpm) | 985 lpm (260 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 6.2 m (20.4') | 9.2 m (30.1') | 6.1 m (19.9') | 9.3 m (30.6') | 1030 lpm (272 gpm) | 985 lpm (260 gpm) |

**PRO-FLO™
ADVANCED**

METAL TECHNICAL SPECS

SIZING CONSIDERATIONS

| CONNECTION TYPE | | | | | | | | | | |
|----------------------|--------|---|-------------------|-------------------|----------|----------|---|-------------------|-------------------|-------------------|
| | MODELS | WETTED MATERIALS | LIQUID INLET | LIQUID DISCHARGE | BSPT/NPT | DIN/ANSI | SHIPPING WEIGHT | HEIGHT | WIDTH | DEPTH |
| PRO-FLO® | P200 | Aluminum Ductile Iron Stainless Steel | 25 mm (1") | 25 mm (1") | • | - | 11 kg (24 lb) 21 kg (47 lb) 23 kg (51 lb) | 343 mm (13.5") | 378 mm (14.9") | 229 mm (9.0") |
| | P400 | Aluminum Alloy C | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 25 kg (55 lb) 38 kg (83 lb) | 594 mm (23.4") | 343 mm (13.5") | 340 mm (13.4") |
| | P400 | Stainless Steel | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 35 kg (77 lb) | 528 mm (20.8") | 384 mm (15.1") | 294 mm (11.6") |
| | P800 | Aluminum Stainless Steel Alloy C | 51 mm (2") | 51 mm (2") | - | • | 34 kg (75 lb) 100 kg (220 lb) 103 kg (228 lb) | 760 mm (29.9") | 439 mm (17.3") | 325 mm (12.8") |
| HIGH PRESSURE | H200 | Ductile Iron Stainless Steel | 25 mm (1") | 25 mm (1") | • | - | 38 kg (84 lbs) 37 kg (81 lbs) | 343 mm (13.5") | 450 mm (17.7") | 305 mm (12.0") |
| | HX400S | Aluminum | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 27 kg (60 lbs) | 605 mm (23.8") | 345 mm (13.6") | 310 mm (12.2") |
| | HX400S | Stainless Steel | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 37 kg (82 lbs) | 528 mm (20.8") | 384 mm (15.1") | 310 mm (12.2") |
| | H800 | Ductile Iron Stainless Steel | 51 mm (2") | 51 mm (2") | - | • | 128 kg (283 lb) 128 kg (283 lb) | 759 mm (29.9") | 490 mm (19.3") | 546 mm (21.5") |
| TURBO-FLO™ | T810 | Aluminum Cast Iron | 51 mm (2") | 51 mm (2") | - | - | 40 kg (89 lb) 60 kg (133 lb) | 508 mm (20.0") | 554 mm (21.8") | 386 mm (15.2") |
| | T1510 | Aluminum Ductile Iron | 76 mm (3") | 76 mm (3") | - | - | 84 kg (185 lb) 162 kg (357 lb) | 754 mm (29.7") | 874 mm (34.4") | 427 mm (16.8") |



PERFORMANCE


MAX. SUCTION LIFT

| MAX. DISCHARGE PRESSURE | MAX. SOLIDS PASSAGE | RUBBER/TPE | | PTFE | | MAX. FLOW | | PRO-FLO® |
|-------------------------------|------------------------|------------------|------------------|------------------|------------------|------------------------|----------------------|----------------------|
| | | DRY | WET | DRY | WET | RUBBER/TPE | PTFE | |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.4 m (17.6') | 9.3 m (30.6') | 3.5 m (11.4') | 9.3 m (30.6') | 212 lpm (56 gpm) | 168 lpm (44 gpm) | |
| 8.6 bar (125 psig) | 7.9 mm (5/16") | 4.2 m (13.6') | 8.9 m (29.5') | 3.4 m (11.3') | 9.0 m (29.5') | 409 lpm (108 gpm) | 329 lpm (87 gpm) | |
| 8.6 bar (125 psig) | 4.8 mm (3/16") | 5.8 m (19.0') | 8.8 m (29.0') | 3.7 m (12.0') | 8.5 m (28.0') | 307 lpm (81 gpm) | 295 lpm (78 gpm) | |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 7.0 m (23.0') | 9.5 m (31.0') | 4.6 m (15.0') | 9.5 m (31.0') | 591 lpm (156 gpm) | 496 lpm (131 gpm) | |
| 20.7 bar (300 psig) | 6.4 mm (1/4") | 2.7 m (9.1') | 9.0 m (29.5') | - | - | 93.9 lpm (24.8 gpm) | - | HIGH PRESSURE |
| 17.2 bar (250 psig) | 8.0 mm (5/16") | 2.5 m (8.2') | 8.6 m (28.2') | - | - | 235 lpm (62 gpm) | - | |
| 17.2 bar (250 psig) | 4.8 mm (3/16") | 2.3 m (8.2') | 8.6 m (28.2') | - | - | 199 lpm (53 gpm) | - | |
| 17.2 bar (250 psig) | 12.7 mm (1/2") | 3.7 m (12.0') | 9.0 m (29.5') | - | - | 360 lpm (95 gpm) | - | |
| 8.6 bar (125 psig) | 51 mm (2") | 7.6 m (25.0') | 9.3 m (30.6') | - | - | 628 lpm (166 gpm) | - | TURBO-FLO™ |
| 8.6 bar (125 psig) | 76 mm (3") | 7.4 m (24.4') | 9.3 m (30.6') | - | - | 977 lpm (258 gpm) | - | |

PLASTIC TECHNICAL SPECS

SIZING CONSIDERATIONS

| Connection Type | | | | | | | | | | |
|-----------------|--------|------------------------|----------------|------------------|----------|----------|---|-----------------|----------------|----------------|
| | Models | Wetted Materials | Liquid Inlet | Liquid Discharge | BSPT/NPT | DIN/ANSI | Shipping Weight | Height | Width | Depth |
| PRO-FLO SHIFT | PS400 | Polypropylene PVDF | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 28 kg (62 lb) 32 kg (70 lb) | 665 mm (26.2") | 476 mm (18.8") | 333 mm (13.1") |
| | PS800 | Polypropylene PVDF | 51 mm (2") | 51 mm (2") | - | • | 40 kg (89 lb) 52 kg (115 lb) | 801 mm (31.5") | 604 mm (23.8") | 371 mm (14.6") |
| | PS1500 | Polypropylene PVDF | 76 mm (3") | 76 mm (3") | - | • | 125 kg (275 lb) 152 kg (335 lb) | 1279 mm (50.3") | 914 mm (36.0") | 584 mm (23.0") |
| PRO-FLO X™ | PX400 | Polypropylene | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 24 kg (52 lb) | 668 mm (26.3") | 478 mm (18.8") | 315 mm (12.4") |
| | PX800 | Polypropylene PVDF | 51 mm (2") | 51 mm (2") | - | • | 33 kg (70 lb) 45 kg (99 lb) | 804 mm (31.7") | 604 mm (23.8") | 356 mm (14.0") |
| PRO-FLO® | P25 | Polypropylene PVDF | 6 mm (1/4") | 6 mm (1/4") | • | - | 2 kg (4 lb) 2 kg (5 lb) | 173 mm (6.8") | 173 mm (6.8") | 127 mm (5.0") |
| | P100 | Polypropylene PVDF | 13 mm (1/2") | 13 mm (1/2") | • | - | 4 kg (8 lb) 5 kg (10 lb) | 277 mm (10.9") | 234 mm (9.2") | 201 mm (7.9") |
| | P200 | Polypropylene PVDF PFA | 25 mm (1") | 25 mm (1") | - | • | 10 kg (22 lb) 15 kg (32 lb) 18 kg (40 lb) | 434 mm (17.1") | 457 mm (18.0") | 231 mm (9.1") |
| | P400 | Polypropylene PVDF | 38 mm (1-1/2") | 38 mm (1-1/2") | - | • | 19 kg (41 lb) 27 kg (59 lb) | 668 mm (26.3") | 478 mm (18.8") | 300 mm (11.8") |
| | P800 | Polypropylene PVDF | 51 mm (2") | 51 mm (2") | - | • | 32 kg (70 lb) 45 kg (99 lb) | 804 mm (31.7") | 604 mm (23.8") | 353 mm (13.9") |
| | P1500 | Polypropylene PVDF | 76 mm (3") | 76 mm (3") | - | • | 138 kg (305 lb) 161 kg (365 lb) | 1280 mm (50.4") | 914 mm (36.0") | 584 mm (23.0") |
| ACCU-FLO™ | A100 | Polypropylene PVDF | 13 mm (1/2") | 13 mm (1/2") | - | • | 4 kg (8 lb) 5 kg (10 lb) | 277 mm (10.9") | 234 mm (9.2") | 226 mm (8.9") |
| | A200P | Polypropylene PVDF | 25 mm (1") | 25 mm (1") | - | • | 14 kg (31 lb) 19 kg (41 lb) | 434 mm (17.1") | 457 mm (18.0") | 257 mm (10.1") |

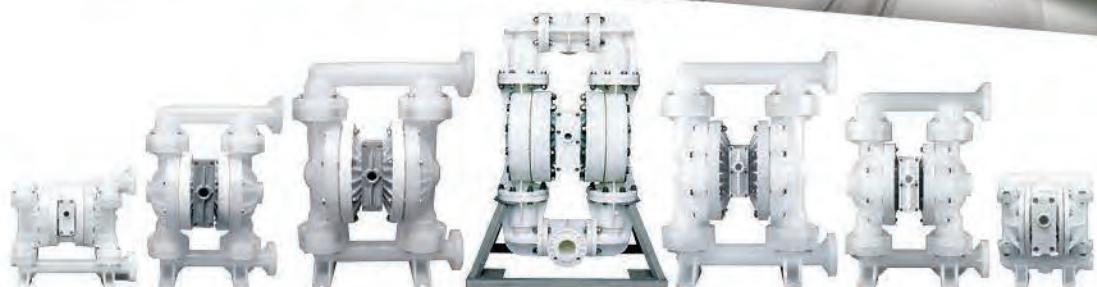

PERFORMANCE

MAX. SUCTION LIFT

| MAX. DISCHARGE PRESSURE | MAX. SOLIDS PASSAGE | RUBBER/TPE | | PTFE | | MAX. FLOW | |
|--|------------------------|------------------|------------------|------------------|------------------|-----------------------|----------------------|
| | | DRY | WET | DRY | WET | RUBBER/TPE | PTFE |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.4 m (17.6') | 9.0 m (29.5') | 5.6 m (18.4') | 9.0 m (29.5') | 458 lpm (121 gpm) | 447 lpm (118 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.9 m (19.3') | 8.3 m (27.2') | 5.7 m (18.7') | 8.3 m (27.2') | 709 lpm (187 gpm) | 654 lpm (173 gpm) |
| 6.9 bar (100 psig) 8.6 bar (125 psig) | 12.7 mm (1/2") | 5.3 m (17.5') | 8.6 m (28.4') | 5.8 m (19.1') | 8.6 m (28.4') | 1025 lpm (271 gpm) | 999 lpm (262 gpm) |

PRO-FLO SHIFT

| | | | | | | | |
|-----------------------|---------------|------------------|------------------|------------------|------------------|----------------------|----------------------|
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.5 m (18.2') | 9.3 m (30.6') | 3.6 m (11.9') | 7.6 m (25.0') | 450 lpm (119 gpm) | 329 lpm (87 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.1 m (19.9') | 9.0 m (29.5') | 4.5 m (14.8') | 7.2 m (23.8') | 693 lpm (183 gpm) | 579 lpm (153 gpm) |

PRO-FLO™

| | | | | | | | |
|-----------------------|----------------|------------------|------------------|------------------|------------------|------------------------|------------------------|
| 8.6 bar (125 psig) | 0.7 mm (1/32") | - | - | 1.9 m (6.2') | 9.3 m (30.6') | - | 16.7 lpm (4.4 gpm) |
| 8.6 bar (125 psig) | 1.6 mm (1/16") | 5.2 m (17.0') | 8.7 m (28.4') | 4.5 m (14.7') | 9.3 m (30.6') | 58.7 lpm (15.5 gpm) | 57.0 lpm (15.0 gpm) |
| 8.6 bar (125 psig) | 4.8 mm (3/16") | 3.6 m (11.9') | 9.8 m (32.0') | 2.4 m (7.9') | 9.4 m (31.0') | 220 lpm (58 gpm) | 174 lpm (46 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 5.5 m (18.2') | 9.3 m (30.6') | 3.3 m (10.8') | 9.7 m (31.8') | 454 lpm (120 gpm) | 318 lpm (84 gpm) |
| 8.6 bar (125 psig) | 6.4 mm (1/4") | 6.2 m (20.4') | 8.7 m (28.4') | 4.2 m (13.6') | 8.7 m (28.4') | 624 lpm (165 gpm) | 504 lpm (133 gpm) |
| 8.6 bar (125 psig) | 12.7 mm (1/2") | 6.2 m (20.4') | - | 3.6 m (12.0') | 8.6 m (28.0') | - | 784 lpm (207 gpm) |

PRO-FLO™

| | | | | | | | |
|-----------------------|----------------|------------------|------------------|------------------|------------------|------------------------|------------------------|
| 8.6 bar (125 psig) | 1.6 mm (1/16") | 6.6 m (21.5') | 9.0 m (29.5') | 5.7 m (18.7') | 9.3 m (30.6') | 42.4 lpm (11.2 gpm) | 38.2 lpm (10.1 gpm) |
| 8.6 bar (125 psig) | 4.8 mm (3/16") | 4.8 m (15.9') | 9.3 m (30.6') | 4.8 m (15.9') | 9.3 m (30.6') | 170 lpm (45 gpm) | 170 lpm (45 gpm) |

ACCU-FLO™



Where Innovation Flows



22069 Van Buren Street
Grand Terrace, CA 92313-5651 USA
T: +1 (909) 422-1730
F: +1 (909) 783-3440
www.wildenpump.com

PSG reserves the right to modify the information and illustrations contained in this document without prior notice. This is a non-contractual document. 09-2014

Authorized PSG Partner: